

This solution integrates door, frame and ironmongery and is certified by independent laboratories. With resistance to 30 minutes fire, can assume acoustic insulation performances up to 45dB.

Esta solución integra puerta, cerco y accesorios los cuales están certificados por laboratorios internacionales. Con resistencia al fuego 30 minutos, presenta performances de aislamiento acústico hasta 45dB.


Fire 30 & acoustic




Technical information

Fire 30 AC34dB


Technical drawings

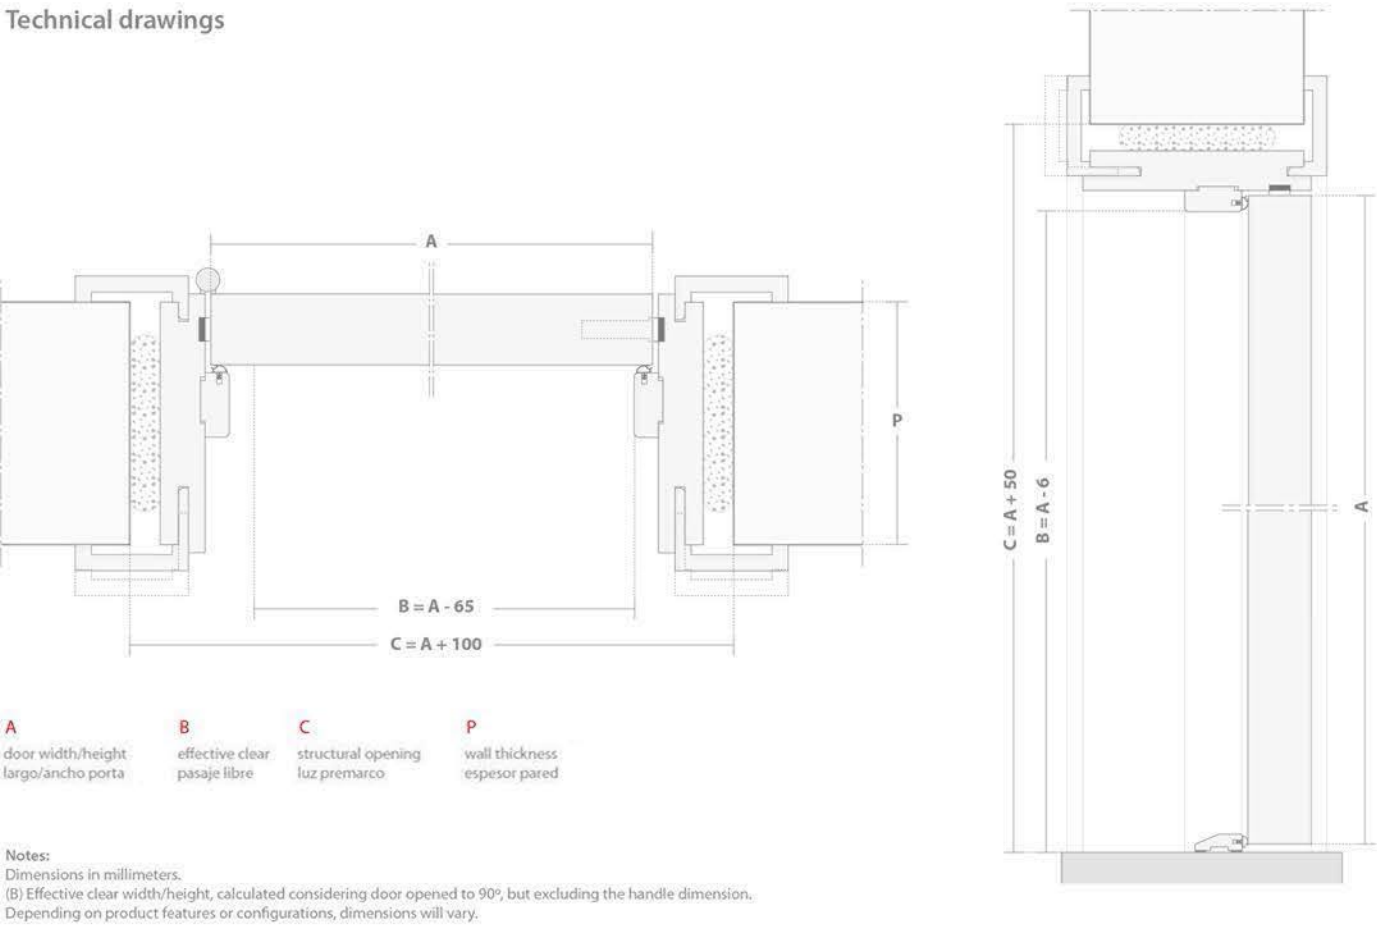

Configurations

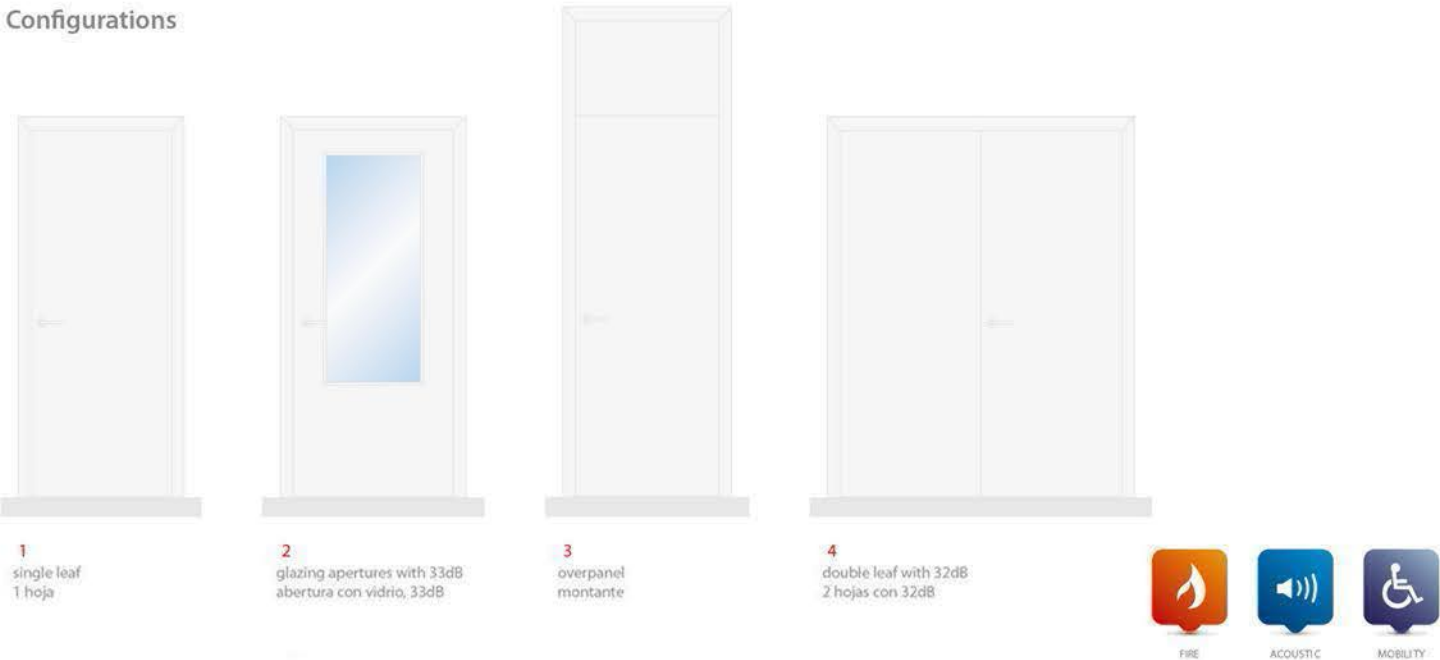

Essential Naturdor® SL Wenge Dark

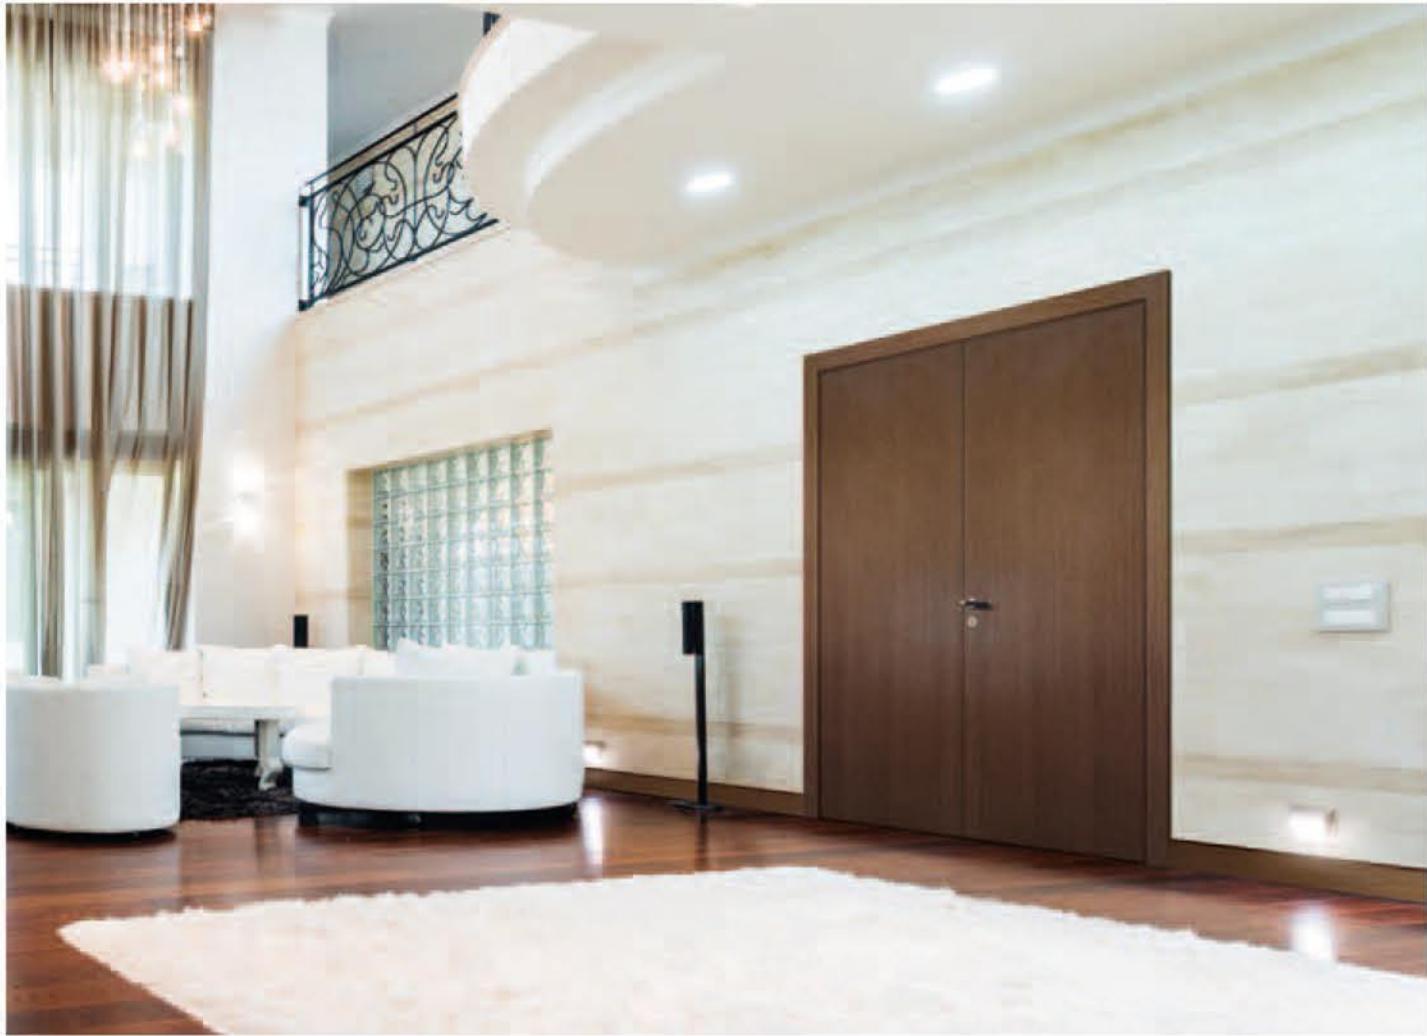


Puerta corta-fuego 30 minutos, 44mm de espesor
Cerco corta-fuego 30 minutos en contrachapado denso
Juntas intumescentes, de aislamiento y marcha pie
Bisagras y cerradura en acero inoxidable con marcado CE
Certificación corta-fuego - EN 13501-2 e BS476 Part22
Certificación acústica - ISO 717-1
Opcional:
Bisagras ocultas y cierrapuertas con brazo
Guillotina para aislamiento acústico 33dB
Mecanizado para cerradura de tarjeta

30 minute fire door, 44mm thickness
30 minute fire resistant frame in high density plywood
Intumescent strips, acoustic seals and threshold
Stainless steel CE marked hinges and lock
Fire certification - EN 13501-2 and BS476 Part22
Acoustic certification - ISO 717-1
Optional:
Concealed hinges and door closer with scissor arm
Automatic drop seal for 33dB isolation
Recessing for electronic lock

Technical information

Fire 30 AC41dB

Technical drawings

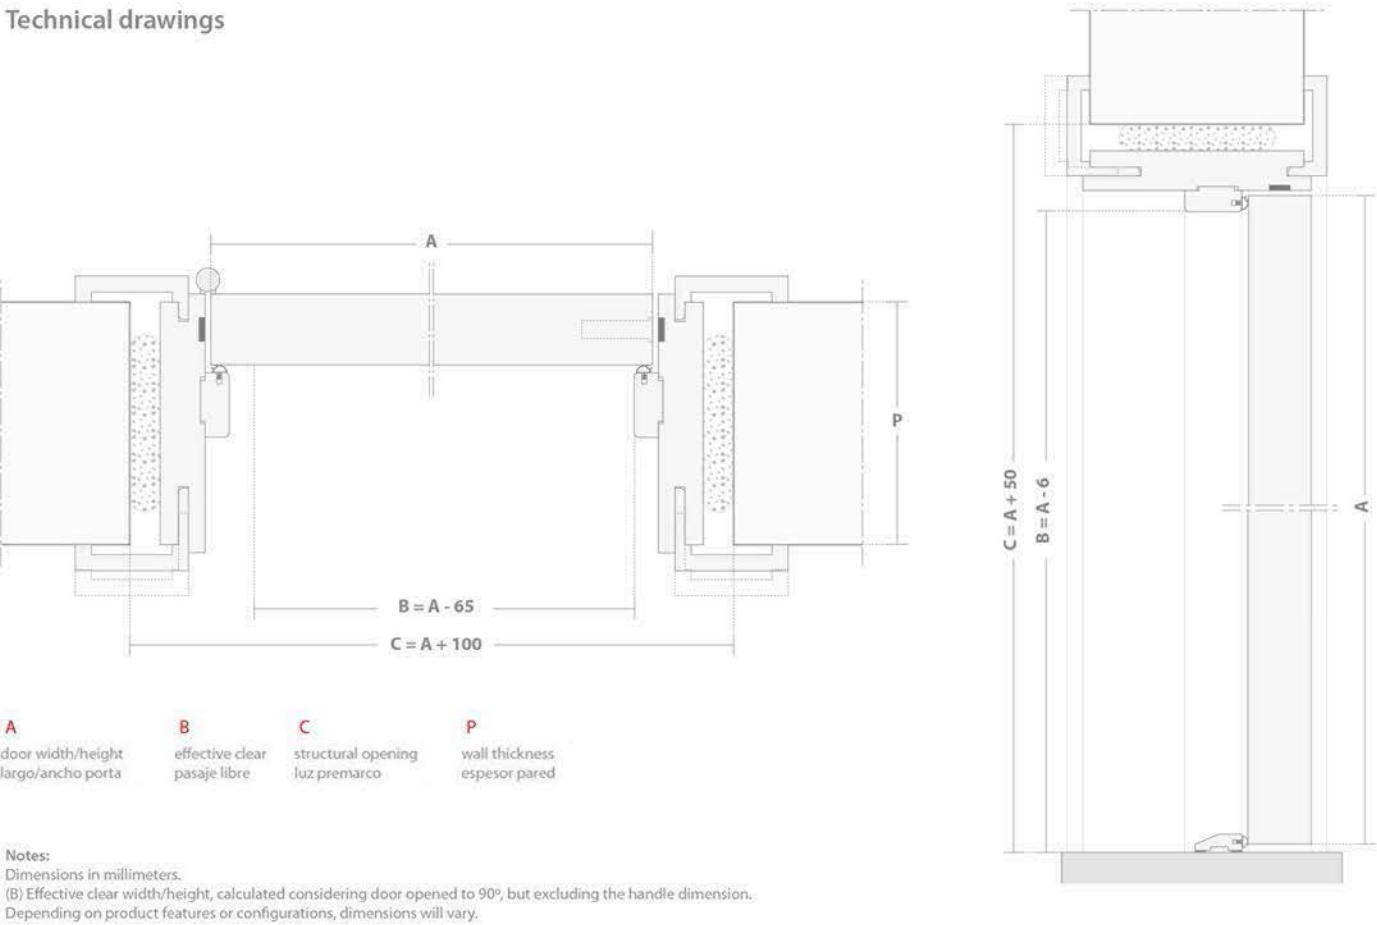

Configurations



1
single leaf
1 hoja



Product Certification Tecnalia, ITECons

Essential Naturdor® Walnut




Puerta corta-fuego 30 minutos, 47mm de espesor
Cerco corta-fuego 30 minutos en contrachapado denso
Juntas intumescentes, de aislamiento y marcha pié
Bisagras y cerradura en acero inoxidable con marcado CE
Certificación corta-fuego - EN 13501-2
Certificación acústica - ISO 717-1
Opcional:
Bisagras ocultas y cierrapuertas con brazo
Guillotina para aislamiento acústico 40dB
Mecanizado para cerradura de tarjeta

30 minute fire door, 47mm thickness
30 minute fire resistant frame in high density plywood
Intumescent strips, acoustic seals and threshold
Stainless steel CE marked hinges and lock
Fire certification - EN 13501-2
Acoustic certification - ISO 717-1
Optional:
Concealed hinges and door closer with scissor arm
Automatic drop seal for 40dB isolation
Recessing for electronic lock

Technical information

Fire 30 AC42dB

Technical drawings

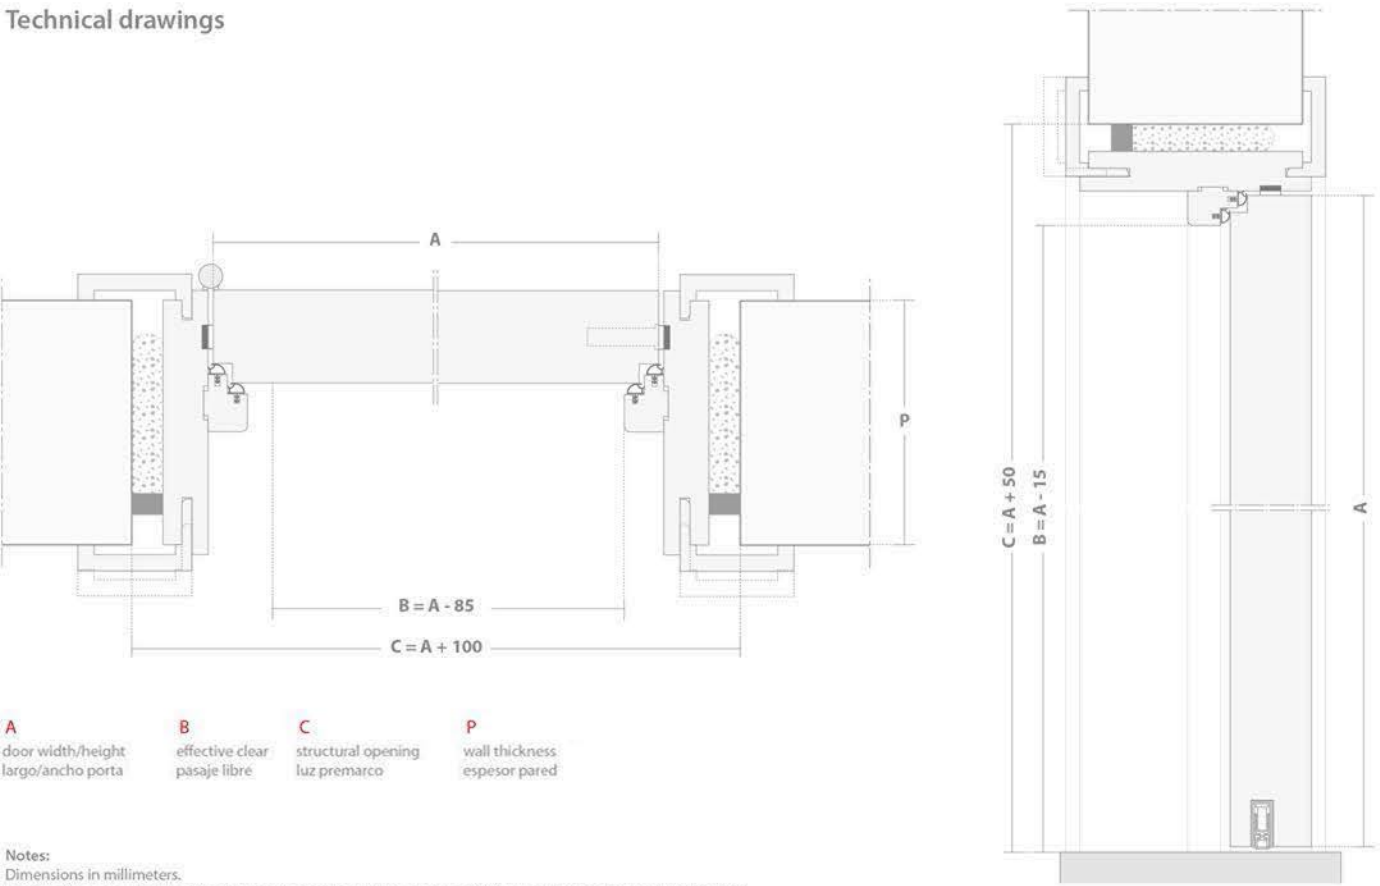

Puerta corta-fuego 30 minutos solapada, espesor 57mm
Cerco corta-fuego 30 minutos en contrachapado denso
Juntas intumescentes y perfil de aislamiento acústico
Marcha pie o guillotina
Bisagras y cerradura en acero inoxidable con marcado CE
Certificación corta-fuego - EN 13501-2 y BS476 Part22
Certificación acústica - ISO 717-1
Opcional:
Bisagras ocultas y cierrapuertas oculto o con brazo
Mecanizado para cerradura de tarjeta

30 minute rebated fire door, 57mm thickness
30 minute fire resistant frame in high density plywood
Intumescent strips and acoustic seals
Threshold or automatic drop seal
Stainless steel CE marked hinges and lock
Fire certification - EN 13501-2 and BS476 Part22
Acoustic certification - ISO 717-1
Optional:
Concealed hinges and door closer or with scissor arm
Recessing for electronic lock

Note: Also available frame in solid wood. Different dimensions will apply.

Configurations




Customised classic design



Technical information

Fire 30 AC45dB

Technical drawings

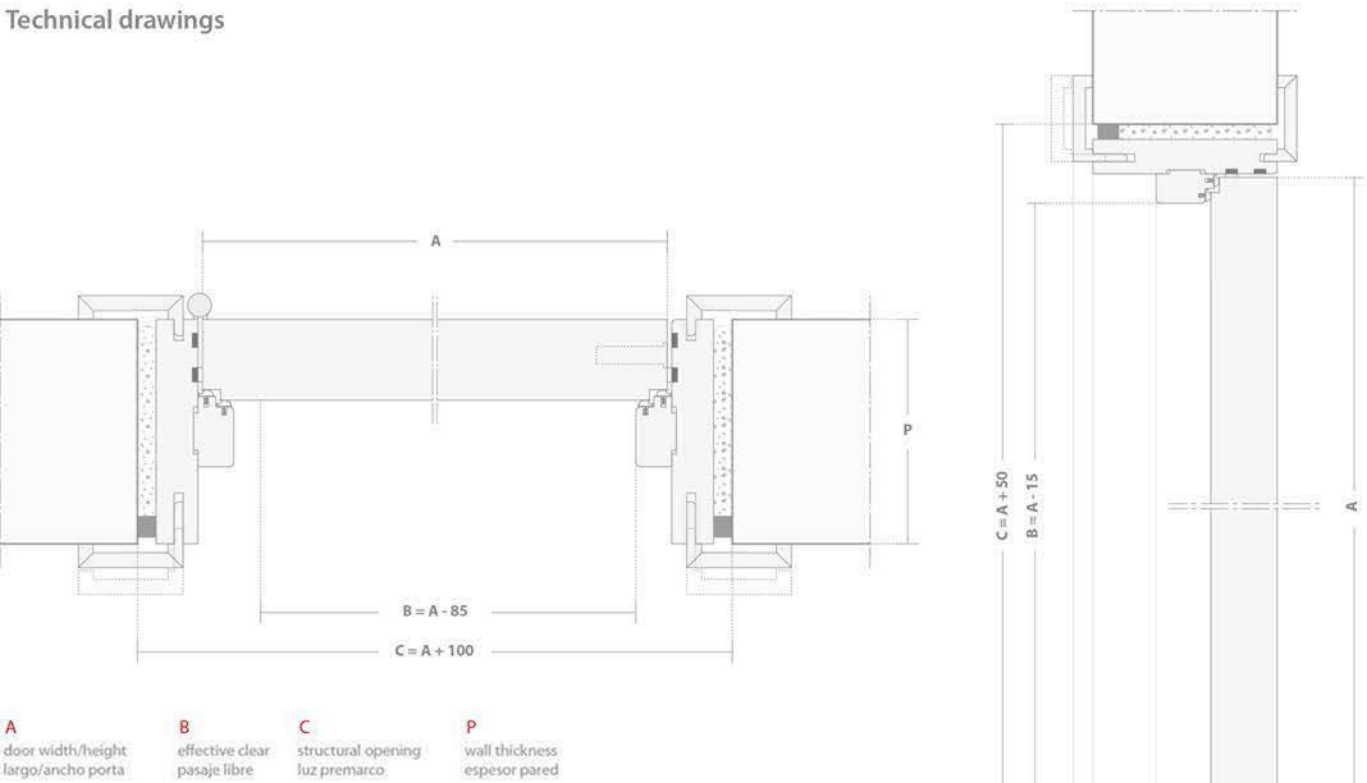

Configurations



Product Certification Tecnalia, ITECons

Puerta corta-fuego 30 minutos solapada, espesor 54mm
Cerro corta-fuego 30 minutos en contrachapado denso
Juntas intumescentes y perfil de aislamiento acústico
Marcha pie y guillotina
Bisagras y cerradura en acero inoxidable con marcado CE
Certificación corta-fuego y acústica - EN 13501-2 / ISO 717-1
Opcional:
Bisagras ocultas y cierrapuertas oculto o con brazo
Marcha pie o doble guillotina para AC44dB
Mecanizado para cerradura de tarjeta

30 minute rebated fire door, 54mm thickness
30 minute fire resistant frame in high density plywood
Intumescent strips and acoustic seals
Threshold and automatic drop seal
Stainless steel CE marked hinges and lock
Fire and acoustic certification - EN 13501-2 / ISO 717-1
Optional:
Concealed hinges and door closer or with scissor arm
Threshold or double automatic drop seal for AC44dB
Recessing for electronic lock

Note: Also available frame in solid wood. Different dimensions will apply.

Threshold



Rebated door with concealed door closer



With door flush to architrave or wall panels, this solution, certified by independent laboratories, is resistant to fire 30 minutes and has acoustic insulation options up to 45dB.

Con la puerta enrasada con las tapetas o paneles, esta solución, certificada por laboratorios internacionales, es resistente al fuego 30 minutos y tiene opciones de aislamiento acústico hasta 45dB.

inverse Fire 30 & acoustic




Customised design white lacquered and walnut

Technical information

inverse Fire 30 AC39dB

Technical drawings

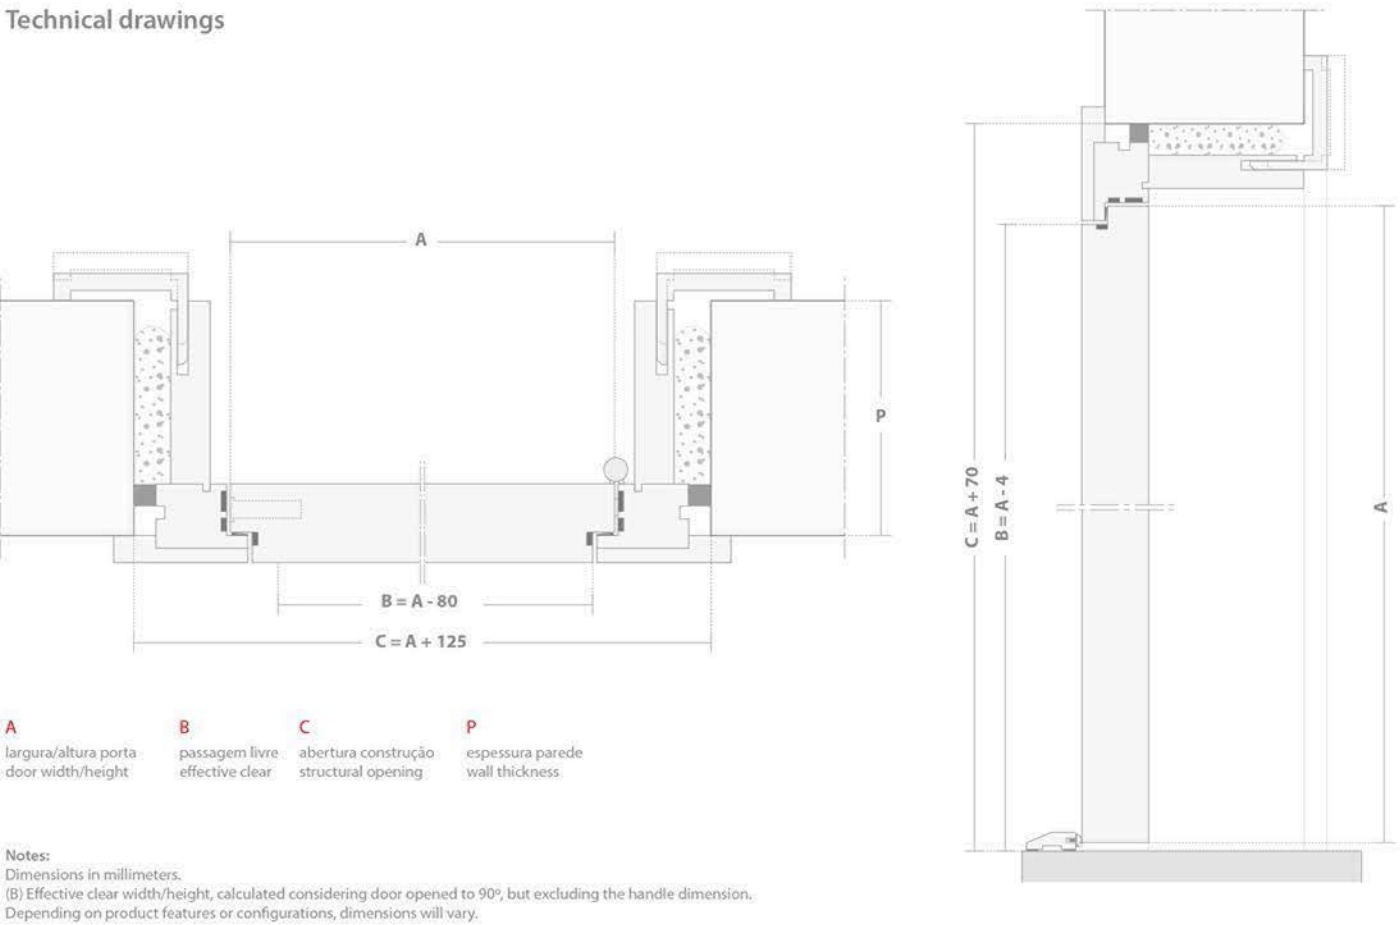

Configurations



1
single leaf
1 hoja



Product Certification Aftilicof, ITECons

Essential Dekordor® 3D Grey




Puerta corta-fuego 30 minutos solapada, espesor 61mm
Cerco corta-fuego 30 min. en madera laminada y contrachapado
Juntas intumescentes, de aislamiento y marcha pié
Bisagras y cerradura en acero inoxidable con marcado CE
Certificación corta-fuego - EN 13501-2
Certificación acústica - ISO 717-1
Opcional:
Cierrapuertas oculto o con brazo
Guillotina para AC38dB
Mecanizado para cerradura de tarjeta

30 minute rebated fire door, 61mm thickness
30 min. fire resistant frame in laminated wood and plywood
Intumescent strips, acoustic seals and threshold
Stainless steel CE marked hinges and lock
Fire certification - EN 13501-2
Acoustic certification - ISO 717-1
Optional:
Concealed door closer or with scissor arm
Automatic drop seal for AC38dB
Recessing for electronic lock

Technical information

inverse Fire 30 AC45dB

Technical drawings

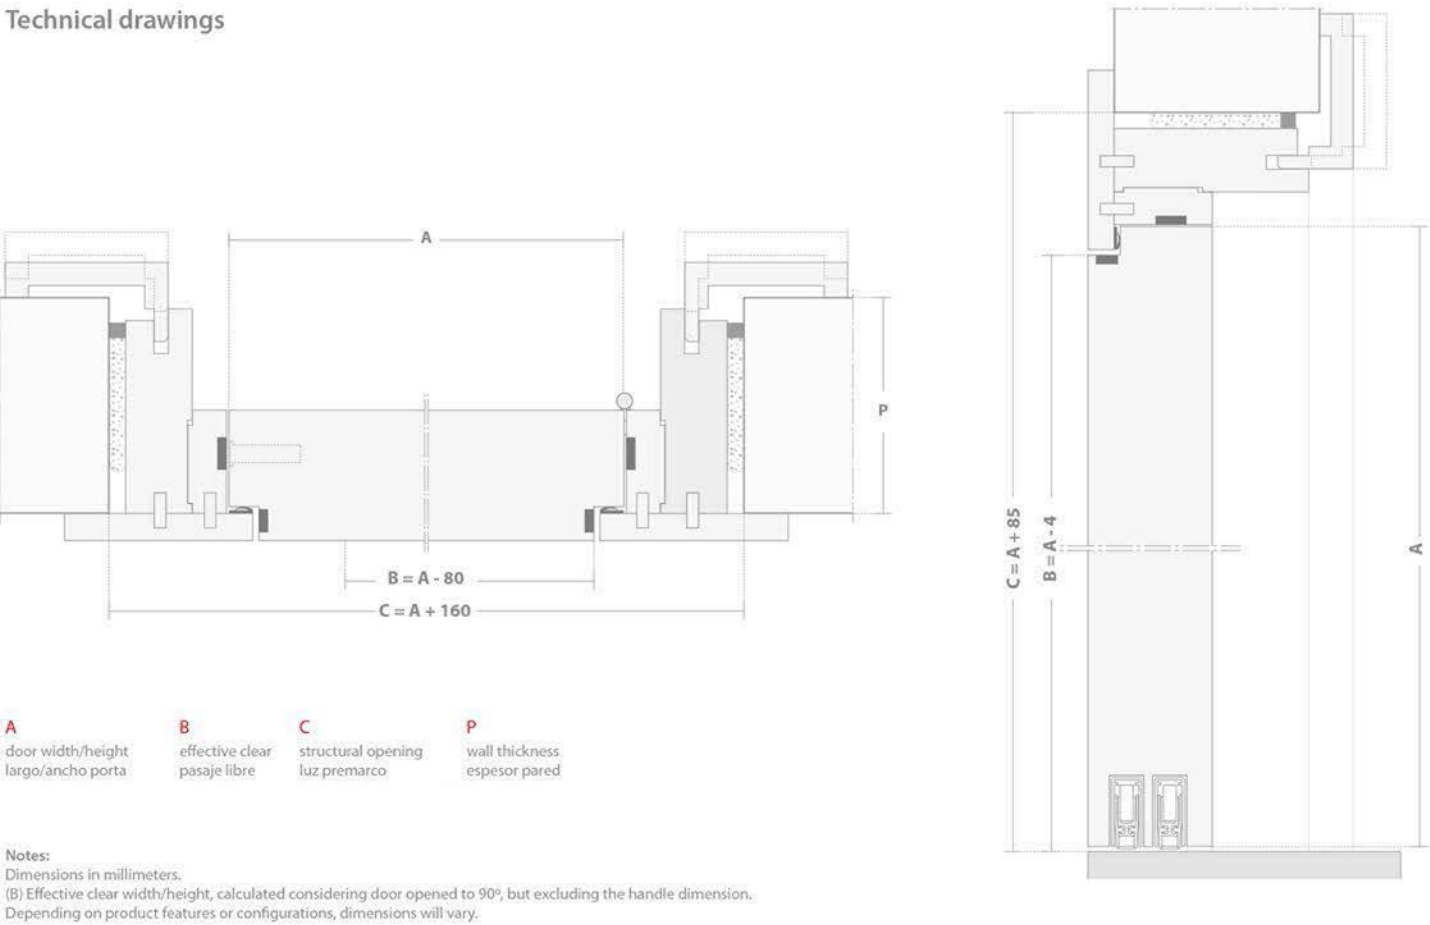

Configurations



1 single leaf
1 hoja



Double automatic drop seal



Essential Naturdor® Stained Marina Grey



Puerta corta-fuego 30 minutos solapada, espesor 61mm
Cerco corta-fuego 30 min. en madera laminada
Juntas intumescentes y perfil de aislamiento acústico
Doble guillotina
Bisagras y cerradura en acero inoxidable con marcado CE
Certificación corta-fuego y acústica - EN 13501-2 / ISO 717-1
Opcional:
Cierrapuertas oculto o con brazo
Una guillotina para AC41dB
Mecanizado para cerradura de tarjeta

30 minute rebated fire door, 61mm thickness
30 min. fire resistant frame in laminated wood
Intumescent strips and acoustic seals
Double automatic drop seal
Stainless steel CE marked hinges and lock
Fire and acoustic certification - EN 13501-2 / ISO 717-1
Optional:
Concealed door closer or with scissor arm
One automatic drop seal for AC41dB
Recessing for electronic lock

This product is available with acoustic insulation between 35 to 43dB and it's certified by independent laboratories as resistant to fire 60 minutes.

Este producto, puede presentar aislamiento acústico de 35 hasta 43dB y está certificado por laboratorios internacionales, como resistente al fuego 60 minutos.


Fire 60 & acoustic



Technical information

Fire 60 AC34dB

Technical drawings

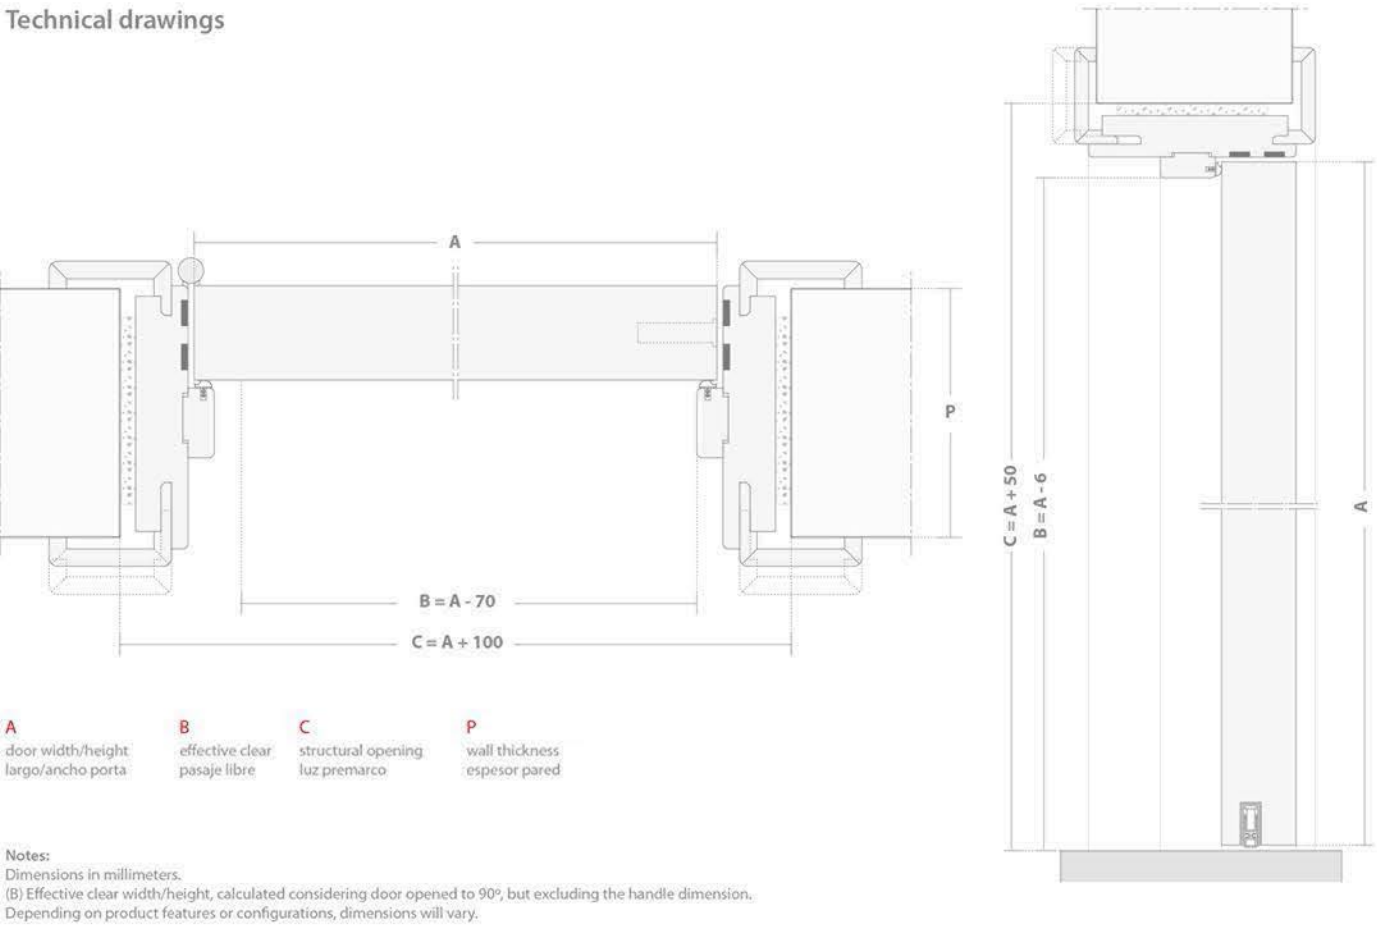

Configurations



Product Certification Exoba MB Trada, Q-Mark, Effectis, Aftilicof, ITeCons

Puerta corta-fuego 60 minutos, 54mm de espesor
Cerco corta-fuego 60 minutos en MDF hidrófugo
Juntas intumescentes, perfil de aislamiento y guillotina
Bisagras y cerradura en acero inoxidable con marcado CE
Certificación corta-fuego - BS476 Part22
Certificación acústica - ISO 717-1
Opcional:
Cierrapuertas oculto o con brazo
Mecanizado para cerradura de tarjeta

60 minute fire door, 54mm thickness
60 minute fire resistant frame in MR MDF
Intumescent strips, acoustic seals and automatic drop seal
Stainless steel CE marked hinges and lock
Fire certification - BS476 Part22
Acoustic certification - ISO 717-1
Optional:
Concealed door closer or with scissor arm
Recessing for electronic lock

Note: Similar solution with frame in solid wood and threshold is available for EI60 AC35dB according with EN 13501-2 standard.


Essential Dekordor® 3D Washed Oak



Technical information

Fire 60 AC43dB

Technical drawings

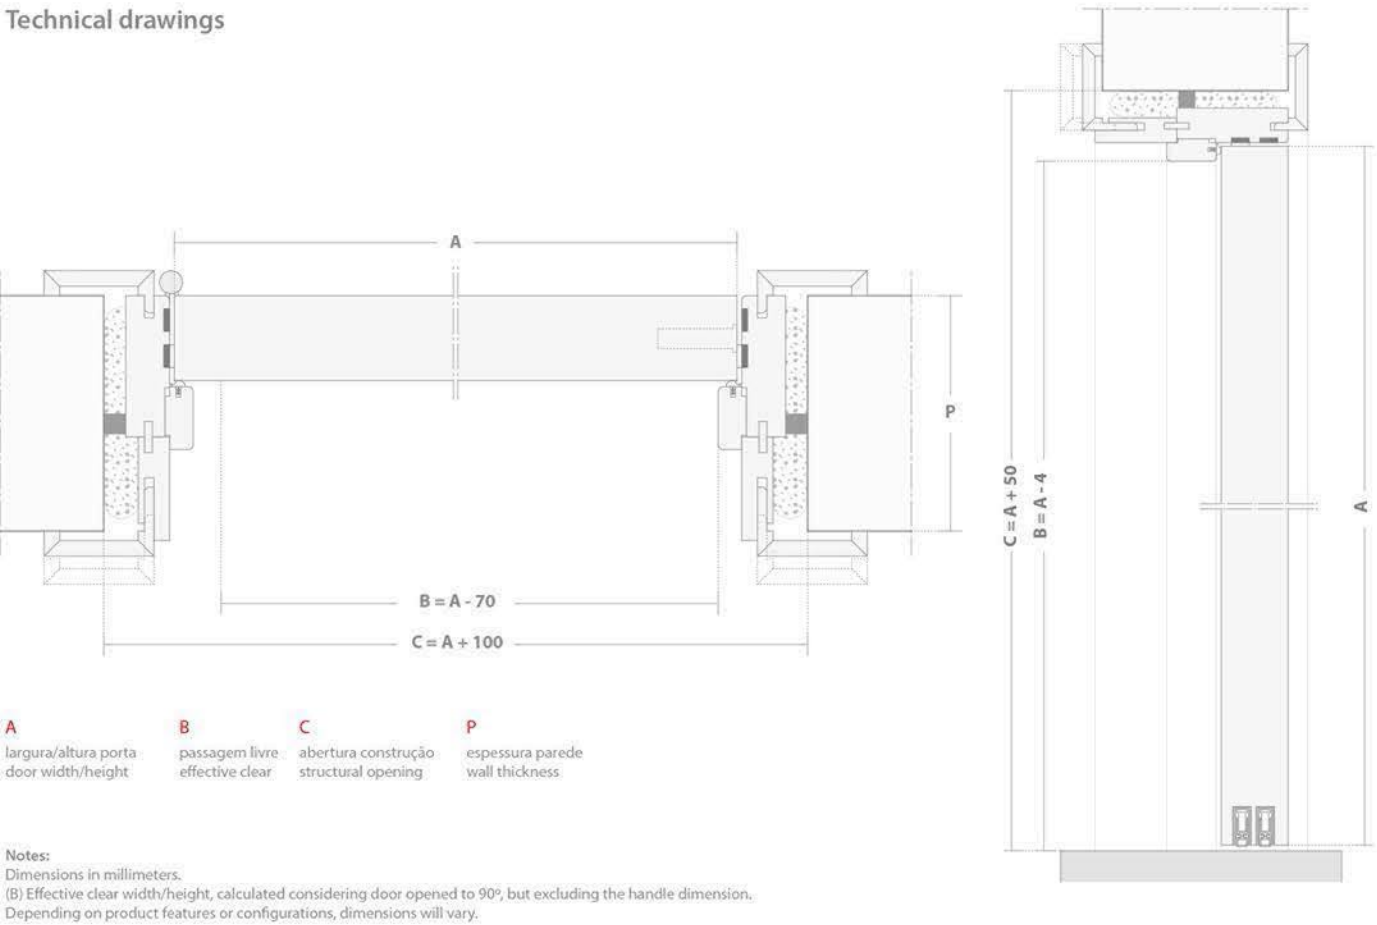

Configurations



Product Certification Tecnalia, ITeCons

Puerta corta-fuego 60 minutos, 54mm de espesor
Cerco corta-fuego 60 minutos en madera y contrachapado
Juntas intumescentes y perfil de aislamiento acústico
Doble guillotina o marcha pié
Bisagras en acero inoxidable con marcado CE
Cerradura con bombillo en acero inoxidable con marcado CE
Certificación corta-fuego - EN 13501-2
Certificación acústica - ISO 717-1
Opcional:
Cierrapuertas con brazo

60 minute fire door, 54mm thickness
60 minute fire resistant frame in solid wood and plywood
Intumescent strips and acoustic seals
Double automatic drop seal or threshold
Stainless steel CE marked hinges
Euro sash lock CE marked
Fire certification - EN 13501-2
Acoustic certification - ISO 717-1
Optional:
Door closer with scissor arm

Essential Naturdor® SL Wenge Dark



Solution which integrates door, frame and ironmongery, certified by independent laboratories as resistant to fire 30 minutes.

Solución que integra puerta, cerco y accesorios, certificada por laboratorios internacionales, como resistente al fuego 30 minutos.

Fire 30




Essential Naturdor® with black stain

Technical information

Fire 30


Technical drawings

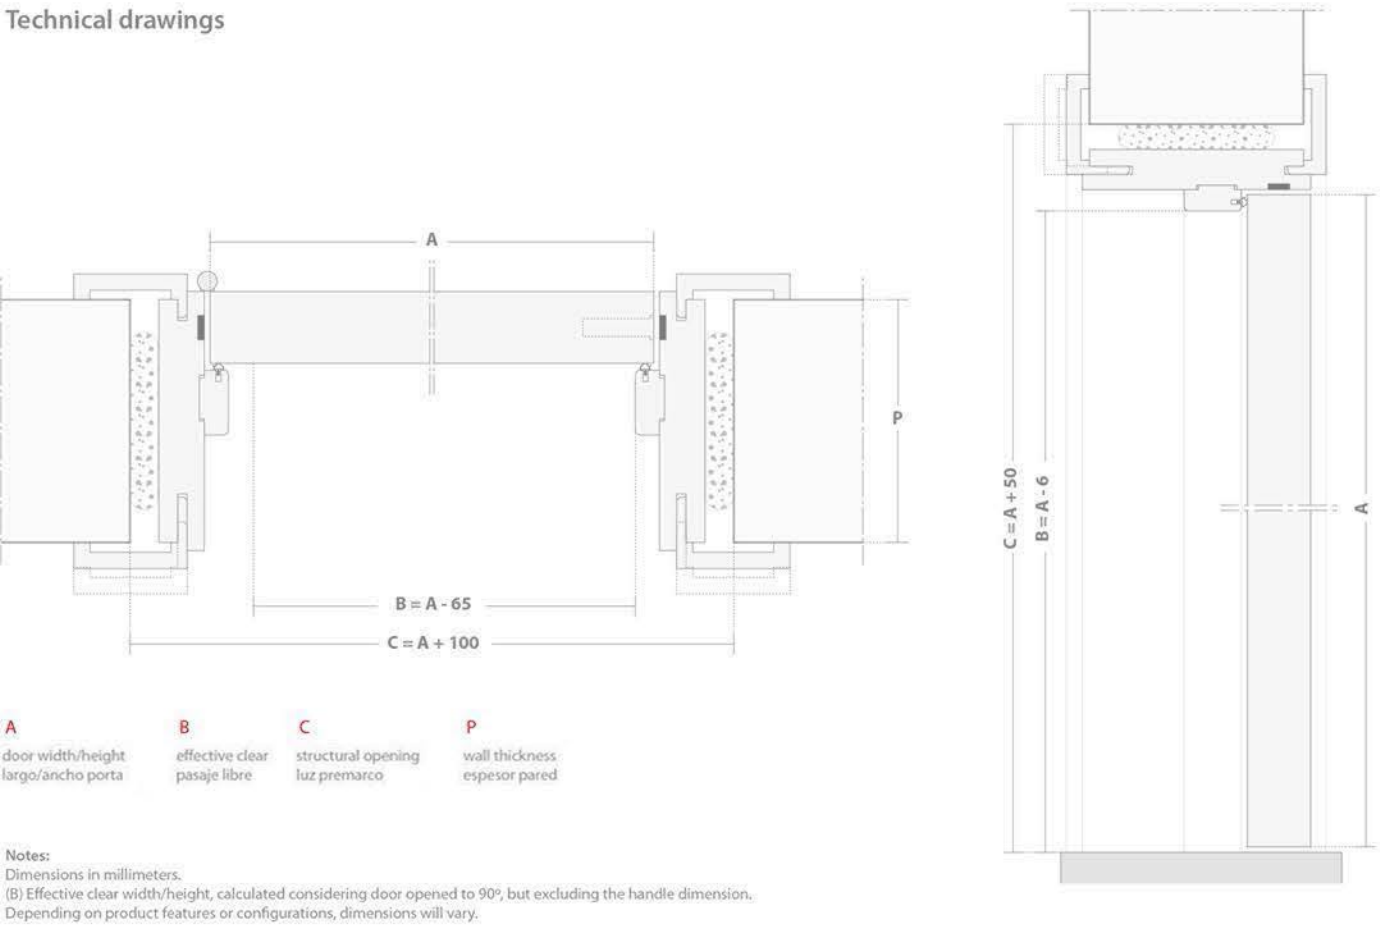

Configurations



Essential Dekordor® HD Dark Grey

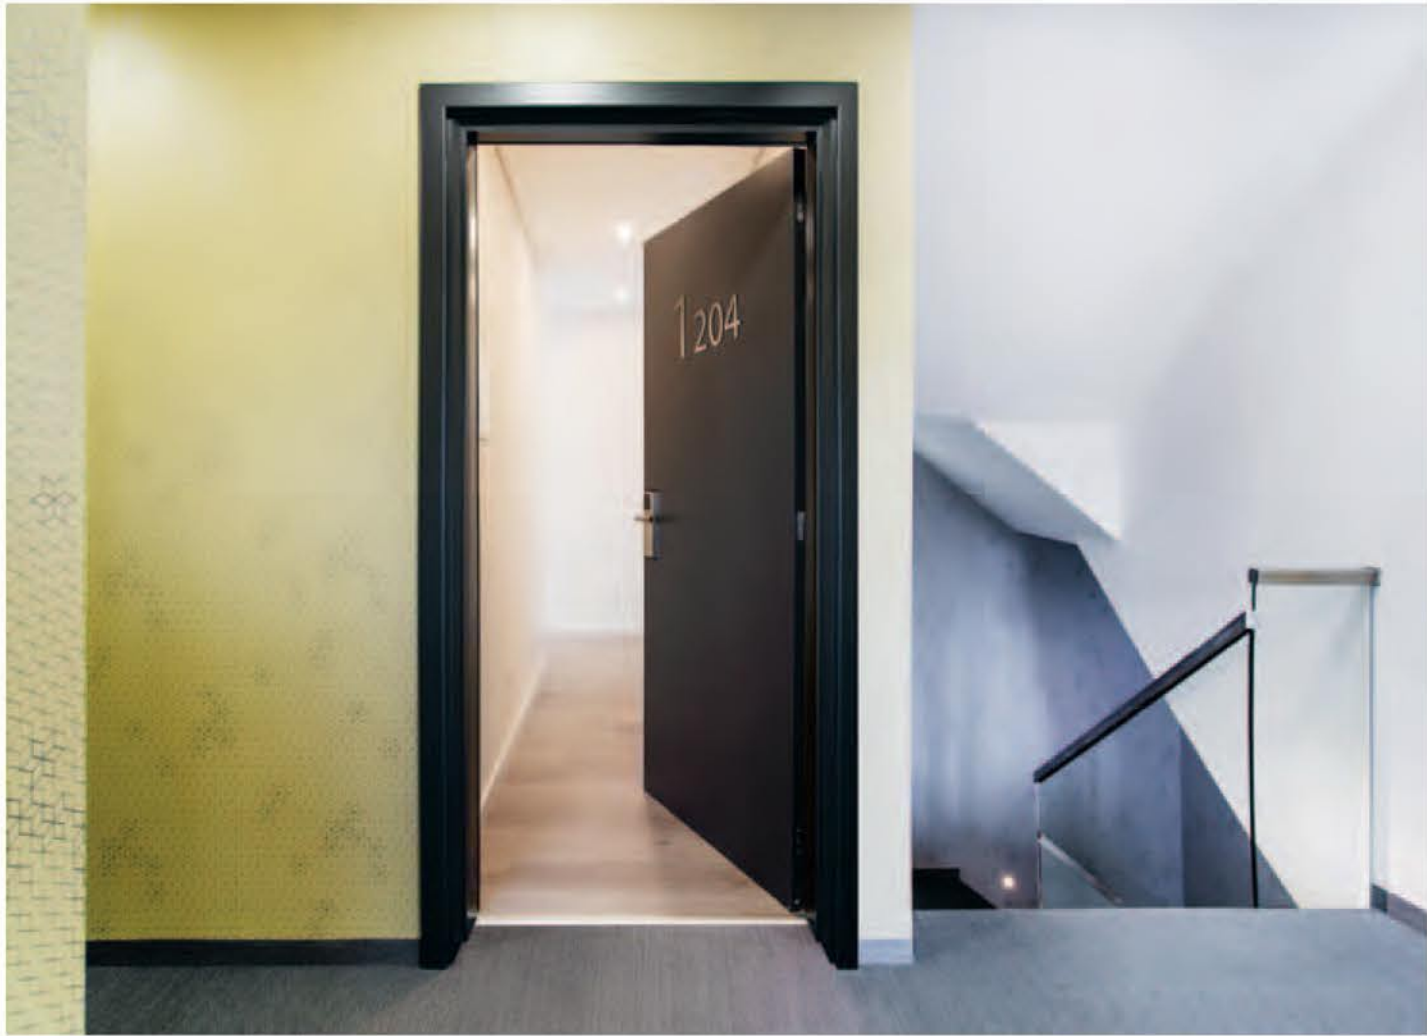


Puerta corta-fuego 30 minutos, 44mm de espesor
Cerco corta-fuego 30 minutos en contrachapado o DM
Juntas intumescentes y perfil de aislamiento
Bisagras y cerradura en acero inoxidable con marcado CE
U-Value 2,1W/m²K - EN 10077-1
Certificación corta-fuego - EN 13501-2 e BS476 Part22
Opcional:
Bisagras ocultas y cierrapuertas con brazo

30 minute fire door, 44mm thickness
30 minute fire resistant frame in plywood or MDF
Intumescent strips and isolation profiles
Stainless steel CE marked hinges and lock
U-Value 2,1W/m²K - EN 10077-1
Fire certification - EN 13501-2 and BS476 Part22
Optional:
Concealed hinges and door closer with scissor arm

Technical information

Fire 30 inverse

Technical drawings

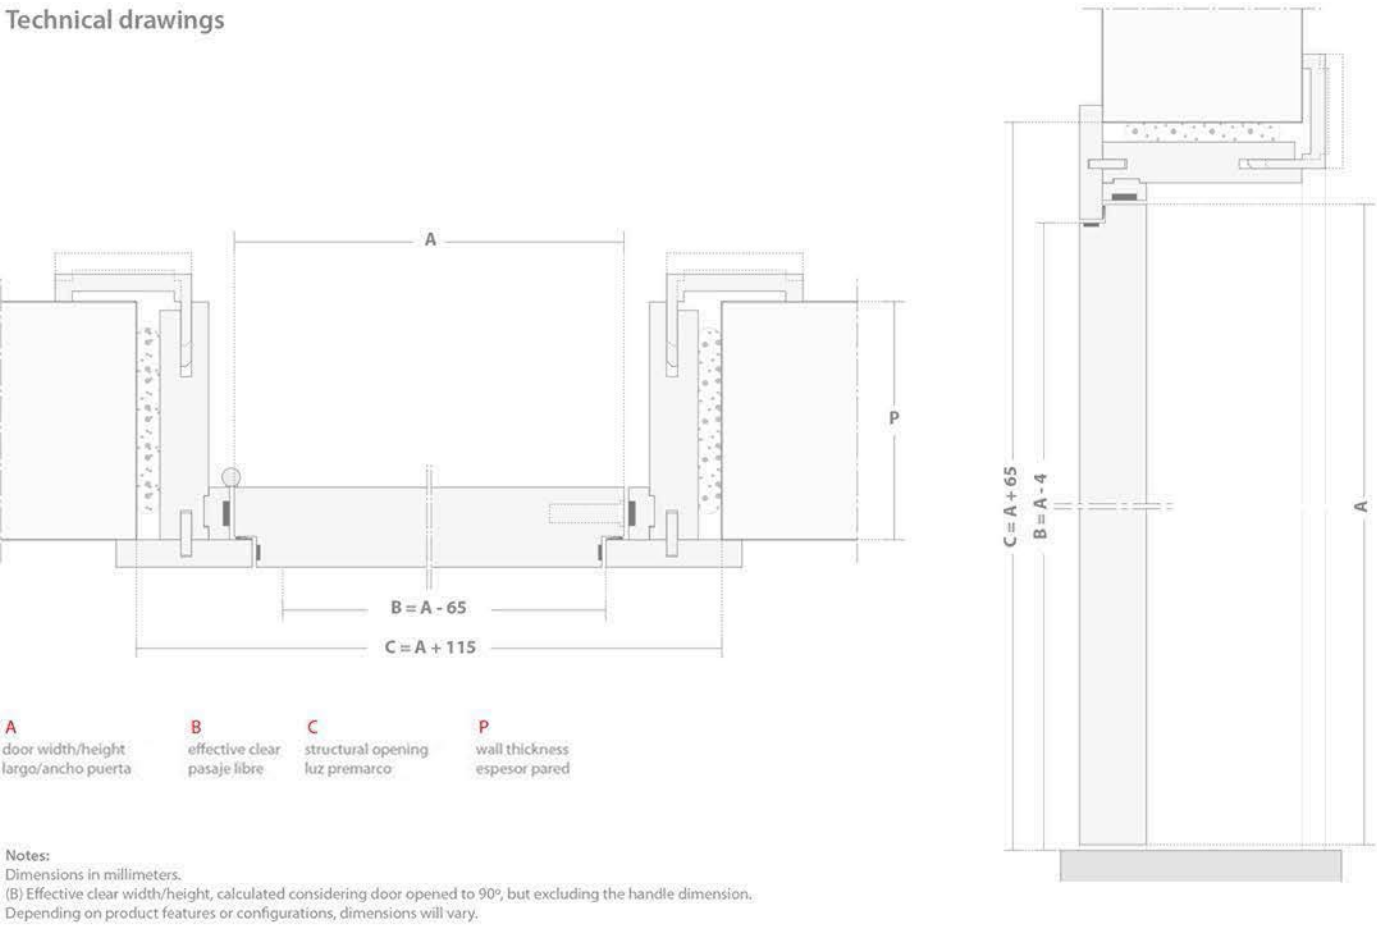

Configurations



1
single leaf
1 hoja



Product Certification Exova BM Trada, Q-Mark

Essential Naturdor® SL Wenge Dark




Puerta corta-fuego 30 minutos, 47mm de espesor
Cerco corta-fuego 30 minutos en contrachapado
Juntas intumescentes y perfil de aislamiento
Bisagras y cerradura en acero inoxidable con marcado CE
U-Value 2,1W/m²K - EN 10077-1
Certificación corta-fuego - EN 13501-2 e BS476 Part22
Opcional:
Guillotina
Mecanizado para cerradura de tarjeta

30 minute fire door, 47mm thickness
30 minute fire resistant frame in plywood
Intumescent strips and isolation profiles
Stainless steel CE marked hinges and lock
U-Value 2,1W/m²K - EN 10077-1
Fire certification - EN 13501-2 and BS476 Part22
Optional:
Automatic drop seal
Recessing for electronic lock

Technical information


Fire 30 swinging

Technical drawings

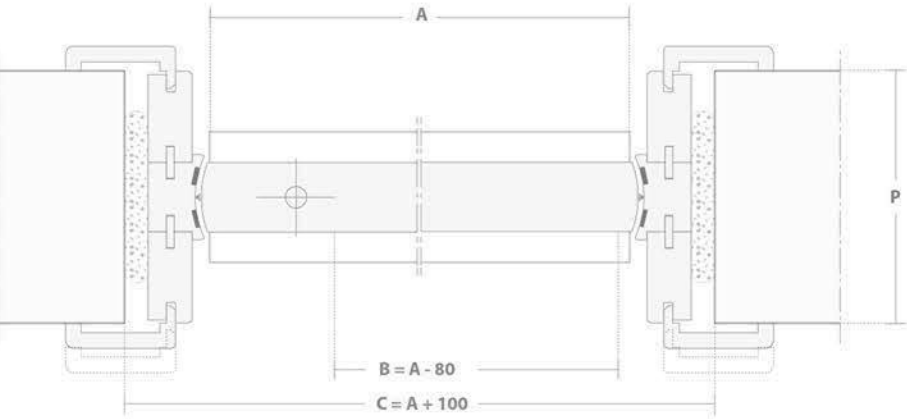

- A**
door width/height
largo/ancho porta
- B**
effective clear
pasaje libre
- C**
structural opening
luz premarco
- P**
wall thickness
espesor pared

Notes:
Dimensions in millimeters.
(B) Effective clear width/height, calculated considering door opened to 90°.
Depending on product features or configurations, dimensions will vary.

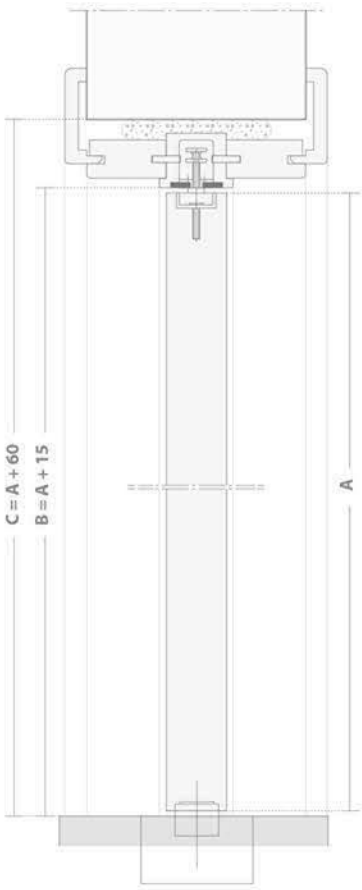

Configurations



Product Certification Aftilicof, Exova BM Trada

- Puerta corta-fuego 30 minutos, 44mm de espesor
Cerco corta-fuego 30 minutos
Cerco en madera y contrachapado
Juntas intumescentes
Cierrapuertas de suelo con marcado CE
Certificación corta-fuego - EN 13501-2 e BS476 Part22
Opcional:
Junta intumescente anti humo
- 30 minute fire door, 44mm thickness
30 minute fire resistant double action frame
Frame in solid wood and plywood
Intumescent strips
Floorspring CE marked
Fire certification - EN 13501-2 and BS476 Part22
Optional:
Anti-smoke seals

Essential Naturdor® with black stain



Product resistant to fire 60 minutes,
which integrates door, frame and
ironmongery, certified by independent
laboratories.

Producto resistente al fuego 60
minutos, que integra puerta, cerco y
accesorios, certificada por laboratorios
internacionales.


Fire 60



Technical information


Fire 60

Technical drawings
(Frame in MDF)

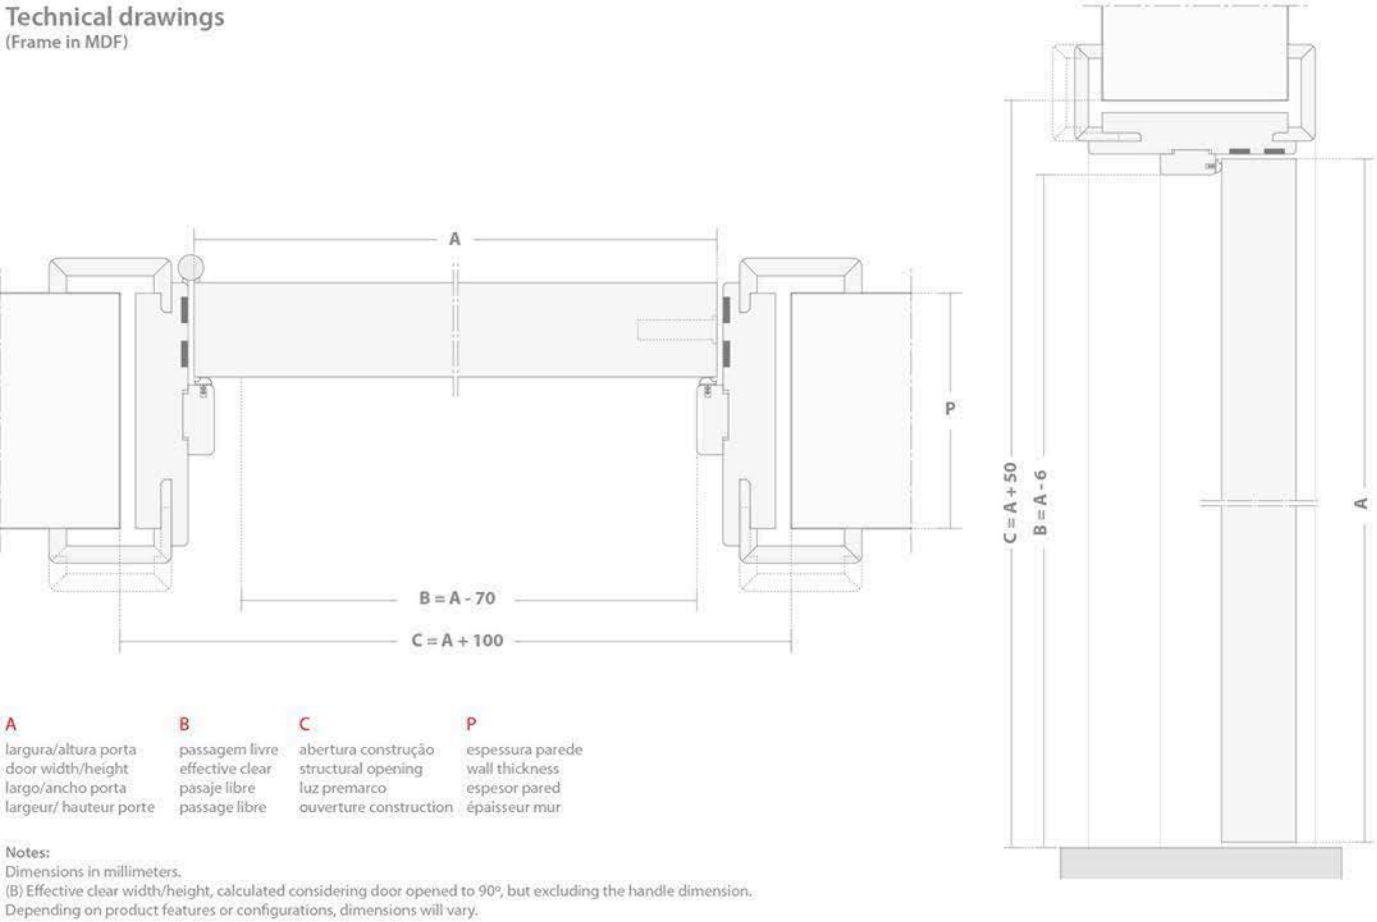

Models and finishes see pages 138 to 145

Configurations

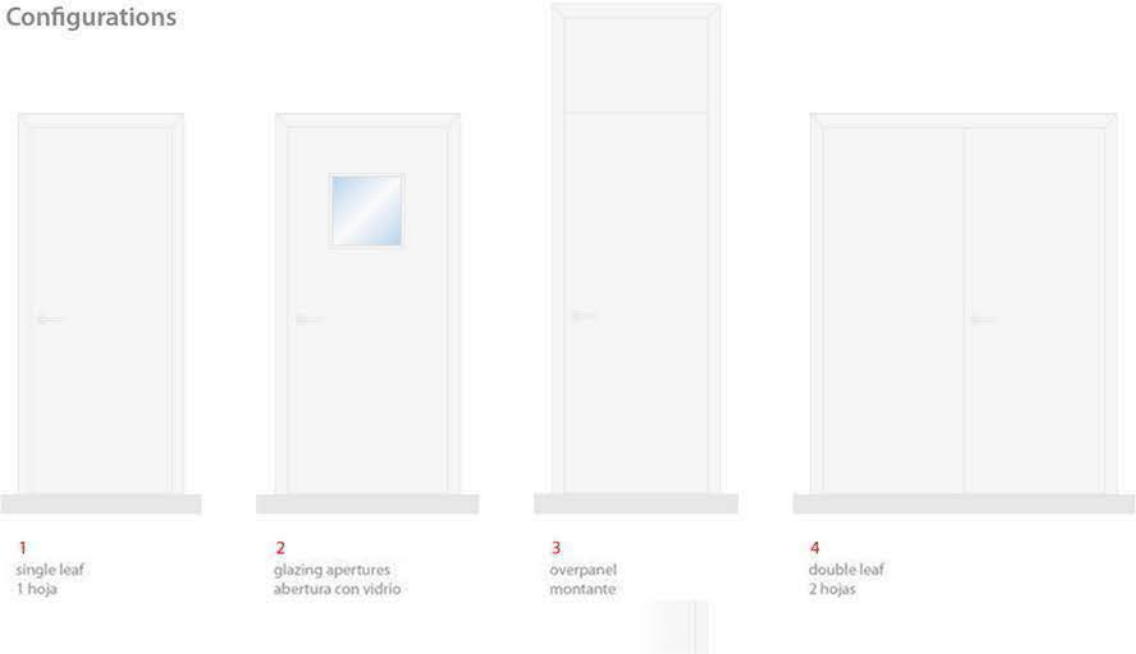

Product Certification Effectis, Aftilicof, Exova BM Trada, Certifire

Essential Dekordor® HD Volcanic Grey



Puerta corta-fuego 60 minutos, 54mm de espesor
Cercos corta-fuego 60 minutos en MDF o madera maciza⁽¹⁾
Juntas intumescentes y perfil de aislamiento
Bisagras y cerradura en acero inoxidable con marcado CE
U-Value 1,8W/m²K para certificación BS
Certificación corta-fuego - EN 13501-2 e BS476 Part22
Opcional:
Bisagras ocultas
Cierrapuertas oculto o con brazo


60 minute fire door, 54mm thickness
60 minute fire resistant frame in MDF or solid wood⁽¹⁾
Intumescent strips and isolation profiles
Stainless steel CE marked hinges and lock
U-Value 1,8W/m²K for BS certification
Fire certification - EN 13501-2 and BS476 Part22
Optional:
Concealed hinges
Concealed door closer or with scissor arm

⁽¹⁾ Frame in MDF only available with standard BS476 Part22. Frame in chipboard also available with standard EN13501-2.

Technical information

Fire 60 swinging


Technical drawings

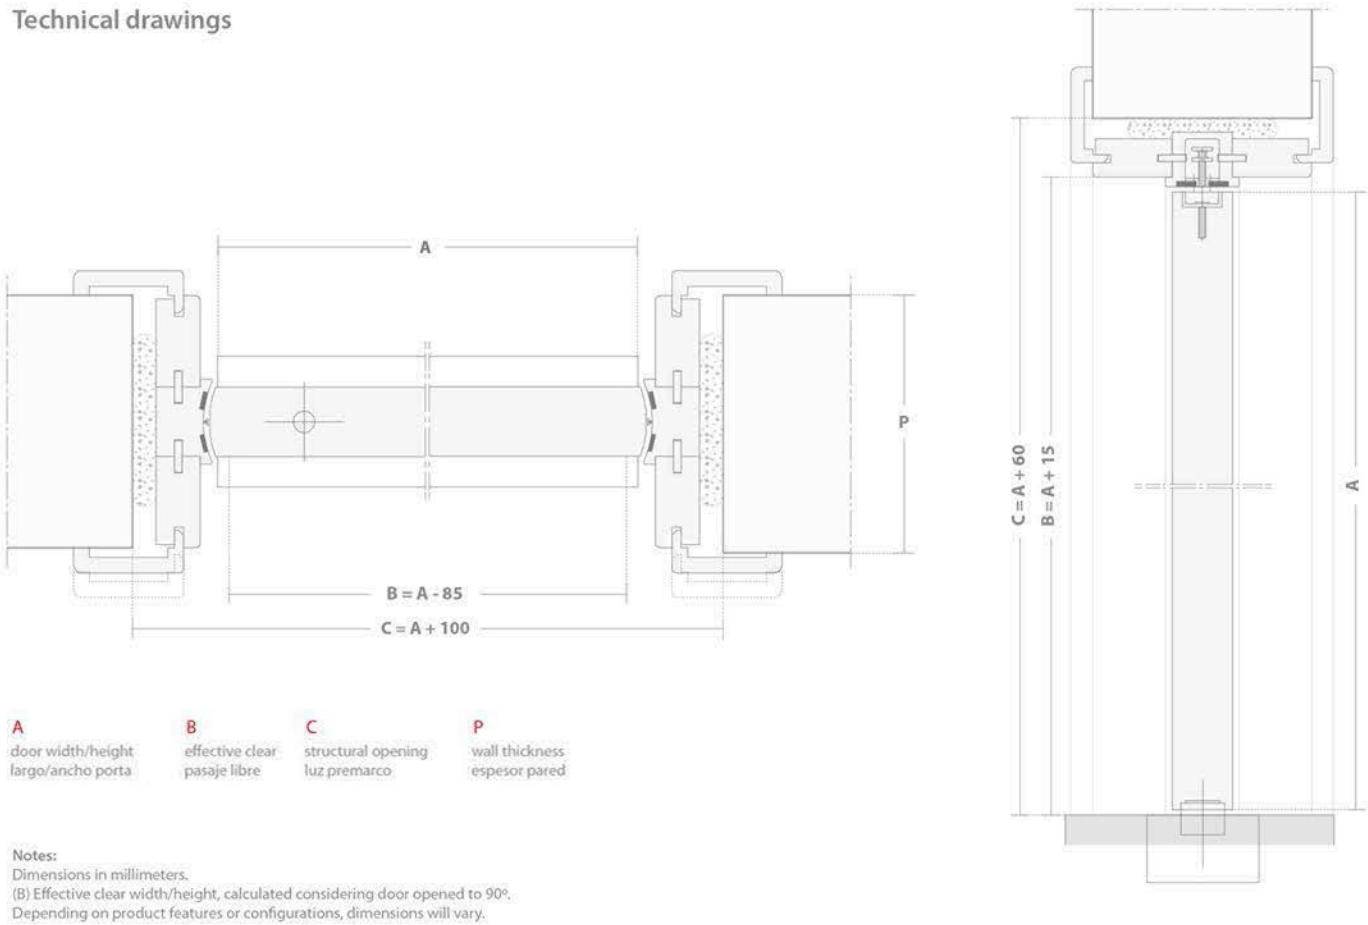

Essential Dekordor® HD Carbon Grey



Configurations

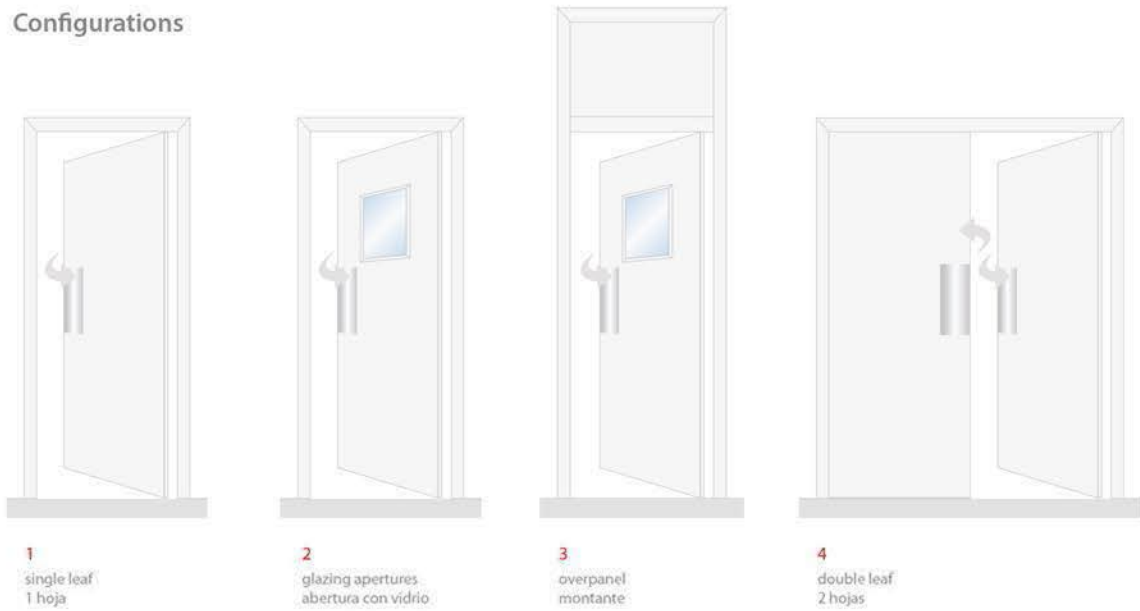

Puerta corta-fuego 60 minutos, 54mm de espesor
Cerco corta-fuego 60 minutos
Cerco en madera y contrachapado denso
Juntas intumescentes
Cierrapuertas de suelo con marcado CE
Certificación corta-fuego - BS476 Part22

60 minute fire door, 54mm thickness
60 minute fire resistant double action frame
Frame in solid wood and high density plywood
Intumescent strips
Floorspring CE marked
Fire certification - BS476 Part22

Suitable to locations where high level of resistance to fire is needed, the portaro® 90 minutes, is certified by independent laboratories and integrates door, frame and ironmongery.

Para locales con altos niveles de exigencia de resistencia al fuego, el portaro® corta-fuego 90 minutos, está certificado por laboratorios internacionales e incluye puerta, cerco y accesorios.


Fire 90




Technical information

Fire 90

Technical drawings

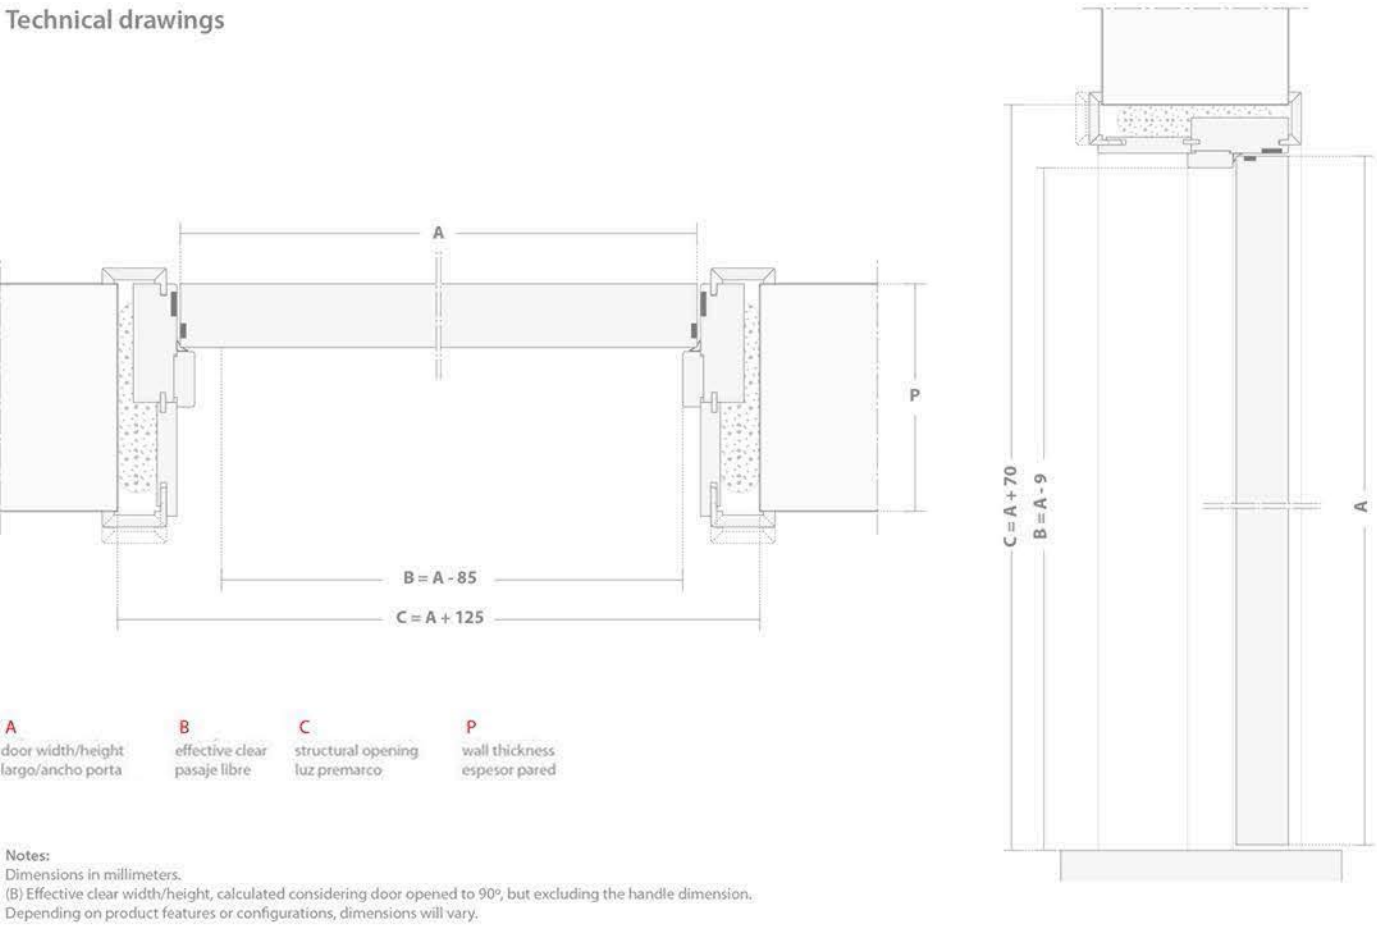

Configurations

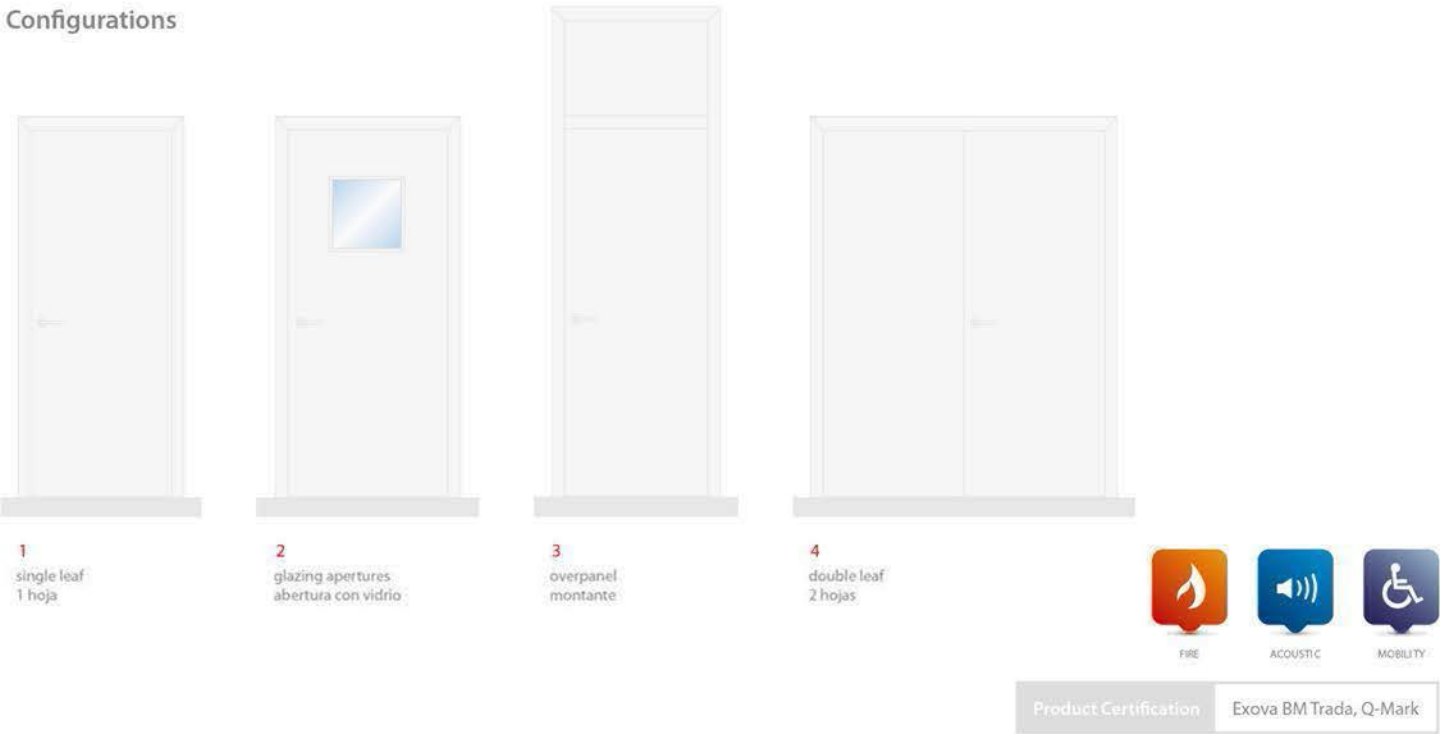

Puerta corta-fuego 90 minutos, 64mm de espesor
Cerro corta-fuego 90 minutos en madera y contrachapado
Juntas intumescentes y perfil de aislamiento
Bisagras y cerradura en acero inoxidable con marcado CE
Certificación corta-fuego - BS476 Part22
Opcional:
Cierrapuertas con brazo
Guillotina

90 minute fire door, 64mm thickness
90 minute fire resistant frame in solid wood and plywood
Intumescent strips and isolation profiles
Stainless steel CE marked hinges and lock
Fire certification - BS476 Part22
Optional:
Door closer with scissor arm
Automatic drop seal

Essential Naturdor® SL Wenge Dark



This versatile system, with a wide range of designs and finishes, is ideal for an elegant and distinct interior decoration. portaro® concept integrates door, frame and ironmongery in a single system.


Este sistema versátil, con una amplia gama de diseños y revestimientos, es la solución ideal para una decoración elegante y distinta. El portaro® integra puerta, cerco y los accesorios en una sola pieza.



Exclusive EX70 Naturdor® Stained Warm Umber


Technical information

Technical drawings

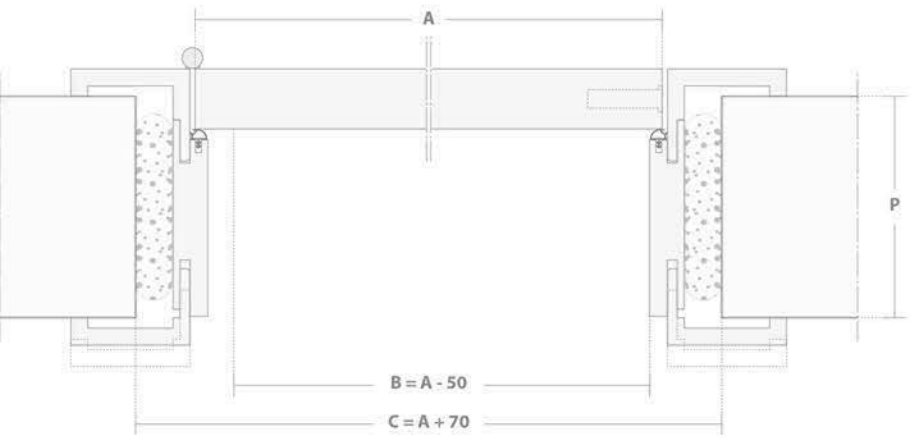

- A** door width/height
largo/ancho porta
- B** effective clear
pasaje libre
- C** structural opening
luz premarco
- P** wall thickness
espesor pared

Notes:
Dimensions in millimeters.
(B) Effective clear width/height, calculated considering door opened to 90°, but excluding the handle dimension.
Depending on product features or configurations, dimensions will vary.

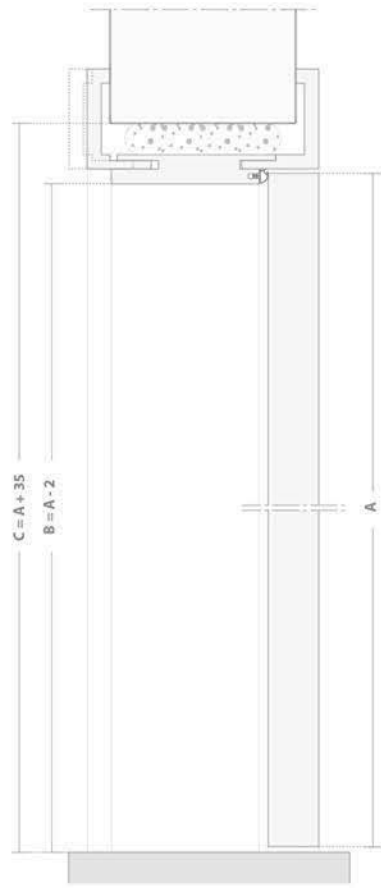

Puerta con interior alveolar o macizo
Cerro en contrachapado o DM
Tapajuntas extensible, recta o volteada
Bisagras y cerradura con acabado en acero inoxidable
Disponible cerradura magnética y bisagras ocultas

Door with honeycomb or solid core
Frame in plywood or MDF
Adjustable architrave, square or rounded
Stainless steel hinges and lock
Available magnetic lock and invisible hinges

Configurations



Hinges



Essential Lacdor White Lacquered



Certified by independent laboratories as resistant to fire 30 minutes and with acoustic insulation up to 32dB, this solution ready to fit, integrates door, frame and ironmongery.


Certificada por laboratorios internacionales, como resistente al fuego 30 minutos y con aislamiento acústico hasta 32dB, esta solución lista a instalar, integra puerta, cerco y accesorios.

block
Fire 30 AC32dB




Technical information

Technical drawings

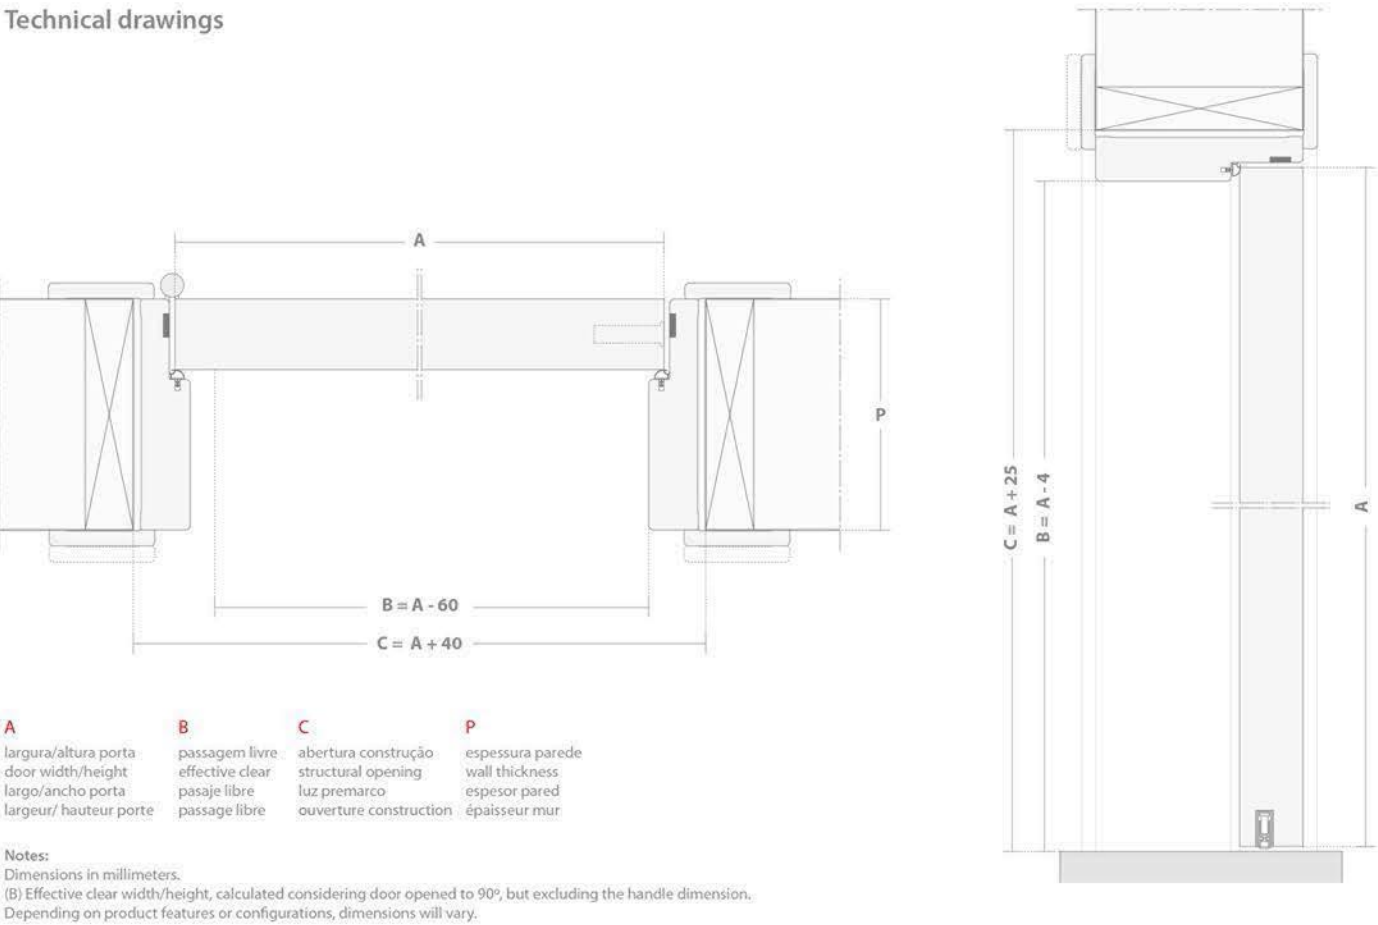

Configurations

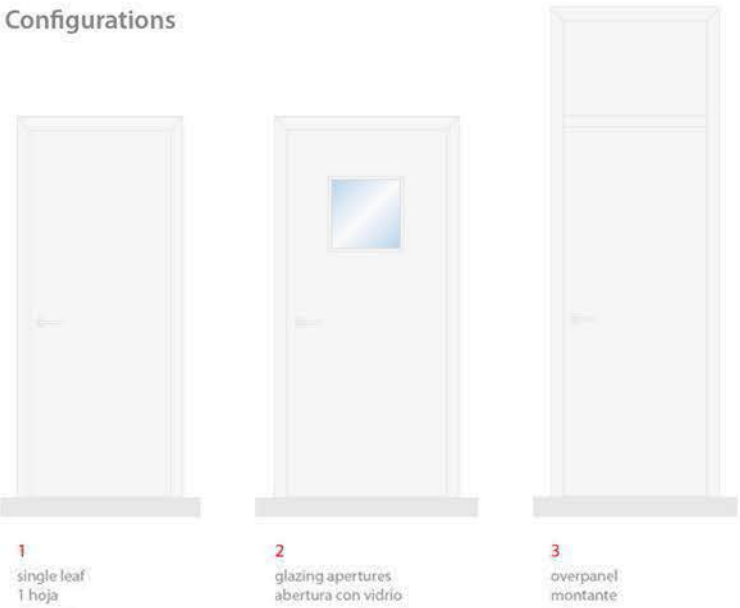

Essential Dekodor® HD Silver Grey



Puerta corta-fuego 30 minutos, 44mm de espesor
Cerco corta-fuego 30 minutos en DM
Juntas intumescentes, de aislamiento y guillotina
Bisagras y cerradura en acero inoxidable con marcado CE
Certificación corta-fuego - EN 13501-2
Certificación acústica - ISO 717-1
Opcional:
Cierrapuertas con brazo
Mecanizado para cerradura de tarjeta

30 minute fire door, 44mm thickness
30 minute fire resistant frame in MDF
Intumescent strips, acoustic seals, automatic drop seal
Stainless steel CE marked hinges and lock
Fire certification - EN 13501-2
Acoustic certification - ISO 717-1
Optional:
Door closer with scissor arm
Recessing for electronic lock

Resistant to fire 60 minutes and with acoustic insulation up to 32dB, this solution ready to fit, is certified by independent laboratories and integrates door, frame and ironmongery.

Resistente al fuego 60 minutos y con aislamiento acústico hasta 32dB, esta solución lista a instalar, está certificada por laboratorios internacionales e integra puerta, cerco y accesorios.


block

Fire 60 AC32dB



Technical information

Technical drawings

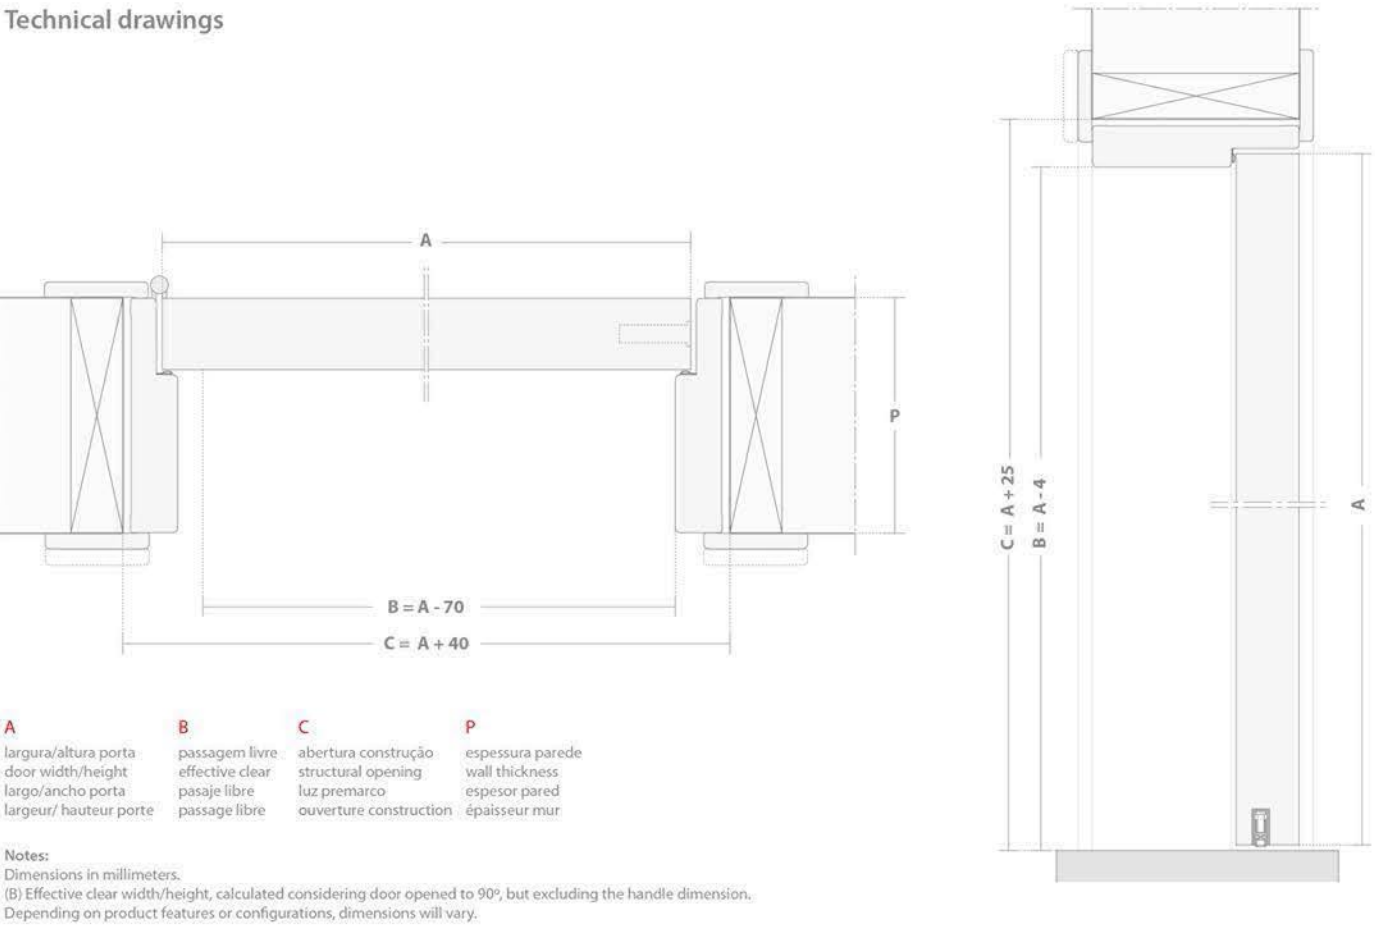

Configurations



1
single leaf
1 hoja



Product Certification Afillicof, ITE Cons

Automatic drop seal



Frame detail



Essential Dekordor® HD Blue Seas



Puerta corta-fuego 60 minutos, 54mm de espesor
Cercos corta-fuego 60 minutos en DM
Juntas intumescentes, de aislamiento y guillotina
Bisagras y cerradura en acero inoxidable con marcado CE
Certificación corta-fuego - EN 13501-2
Certificación acústica - ISO 717-1
Opcional:
Cierrapuertas con brazo
Mecanizado para cerradura de tarjeta

60 minute fire door, 54mm thickness
60 minute fire resistant frame in MDF
Intumescent strips, acoustic seals, automatic drop seal
Stainless steel CE marked hinges and lock
Fire certification - EN 13501-2
Acoustic certification - ISO 717-1
Optional:
Door closer with scissor arm
Recessing for electronic lock

Block is a rapid build interior door system, which combine door, frame and ironmongery. This product is available in kit or set solution, in a wide range of finishes and designs.


El sistema de block es un conjunto de puerta, cerco, tapetas y accesorios listos para instalar. Este producto está disponible montado o en kit y en una amplia gama de revestimientos y diseños.

block




Technical information

Technical drawings

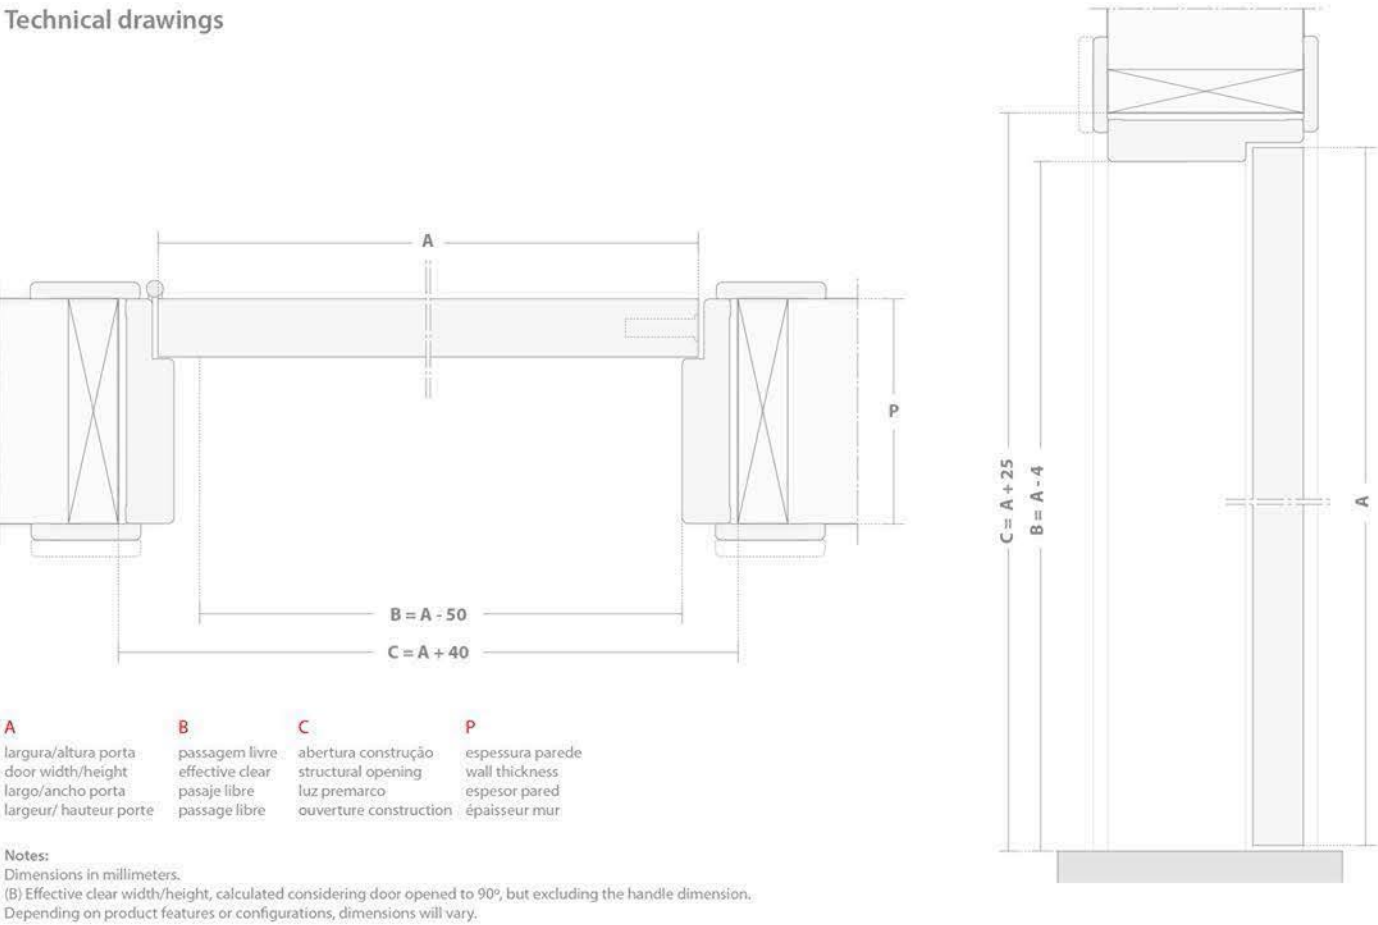

Models and finishes see pages 138 to 145

Configurations

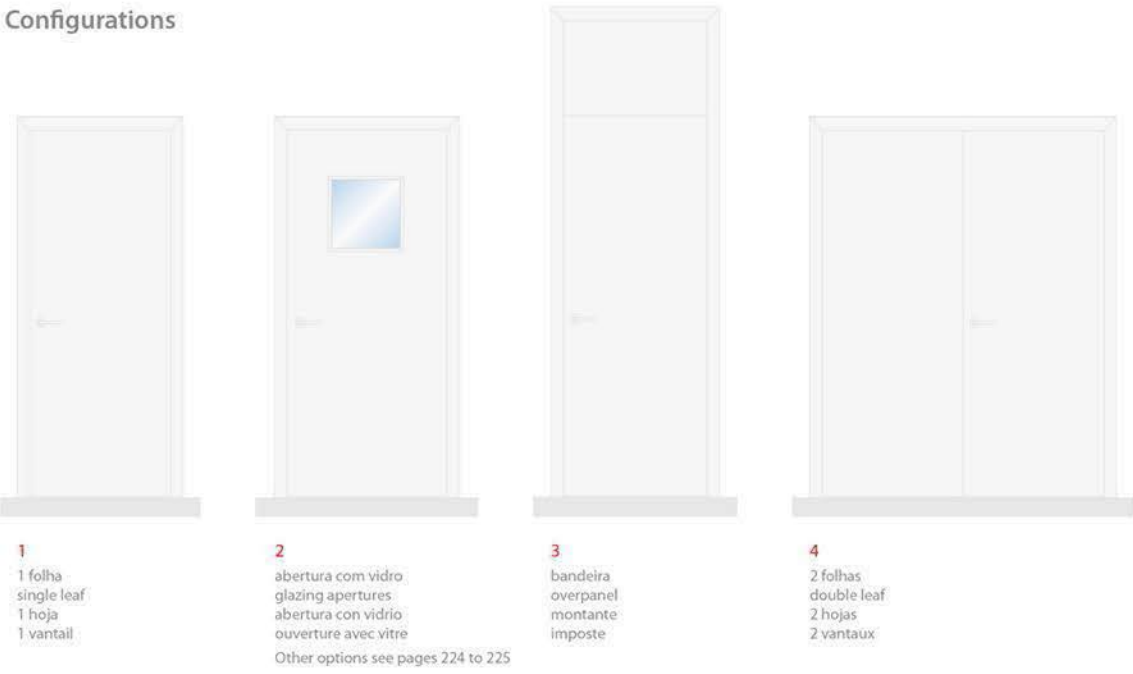

Puerta con interior alveolar o macizo
Cerco y tapetas volteadas en DM
Puerta disponible con lambor
Opción de cerco con junta de goma
Disponible con tapajuntas extensibles

Door with honeycomb or solid core
Rounded frame and architraves in MDF
Door available with inclined edge
Frame with rubber seal as option
Available adjustable architraves

Essential Naturdor® Stained Deep Brown



wardrobes

& dressing rooms







Essential Laccor Grey Beige

Technical information

wardrobes & dressing rooms

1 Storage solutions for dressing rooms

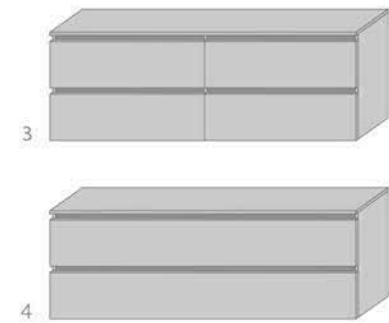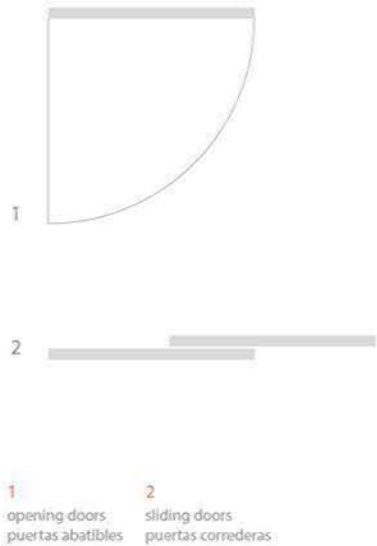

3 4 deep drawers module: cajonera 4 cajones

4 2 deep drawers module: cajonera 2 cajones

5 modules with 4 or 2 drawers: cajonera con 4 o 2 cajones

6 panel front: frente placa

7 shelves: baldas

Wardrobes with sliding doors



Interior finishes (some options)



Modulación flexible
Cajoneras y baldas
Amplia gama de diseños y tonos para el interior
Opcional: barra iluminada, bisagras y cajones con cierre suave

Flexible modulation
Various drawers modules and shelves
Various patterns and tones for interiors
Optional: illuminated hanger bar, soft closer hinges and slides

ranges

Essential Range

Flush designs



Vertical



Horizontal

Inlaid designs (also available with grooves)



IG2V



IG2H

Grooved designs



PG2V



PG1P

Exclusive Range



EX70



EX73



EX5.0/00T



EX5.1/01

Finish Options
EX70 / EX73

Warm Umber



Deep Taupe



Charcoal Brown

Classic Range



M3100



M3200



K3100



K3300

finishes

NATURDOR®

Real wood veneer Chapa de madera natural

- | | | | |
|-------------------|-----------------|-------------------|---------------|
| 1 Freixo | 1 Ash | 1 Fresno | 1 Frêne |
| 2 Faia Vaporizada | 2 Steamed Beech | 2 Haya Vaporizada | 2 Hêtre Étuvé |
| 3 Nogueira | 3 Walnut | 3 Nogal | 3 Noyer |
| 4 Maple | 4 Maple | 4 Roble | 4 Érable |
| 5 Cerejeira | 5 Cherry | 5 Cerezo | 5 Cerisier |
| 6 Carvalho | 6 Oak | 6 Roble | 6 Chêne |
| 7 Sapelly | 7 Sapele | 7 Sapelly | 7 Sapelly |



NATURDOR® SL

Straight line veneers Chapa de madera recompuesta


- | | | | |
|-----------------|-----------------|-----------------|-----------------|
| 8 Wenge Dark SL | 8 Wenge Dark SL | 8 Wenge Dark SL | 8 Wenge Dark SL |
| 9 Carvalho SL | 9 Oak SL | 9 Roble SL | 9 Chêne SL |
| 10 Nogueira SL | 10 Walnut SL | 10 Nogal SL | 10 Noyer SL |
| 11 Teka SL | 11 Teak SL | 11 Teka SL | 11 Teak SL |
| 12 Zebrano SL | 12 Zebrano SL | 12 Zebrano SL | 12 Zebrano SL |
| 13 Ébano SL | 13 Ebony SL | 13 Ébano SL | 13 Ebène SL |



NATURDOR® STAINED

Real wood veneer stained Chapa de madera natural teñida

- | | | | |
|--------------------|--------------------|--------------------|--------------------|
| 14 Dark Champagne | 14 Dark Champagne | 14 Dark Champagne | 14 Dark Champagne |
| 15 Deep Brown | 15 Deep Brown | 15 Deep Brown | 15 Deep Brown |
| 16 Marina Grey | 16 Marina Grey | 16 Marina Grey | 16 Marina Grey |
| 17 Nightfall Black | 17 Nightfall Black | 17 Nightfall Black | 17 Nightfall Black |
| 18 Pastel Cream | 18 Pastel Cream | 18 Pastel Cream | 18 Pastel Cream |
| 19 Toffee Brown | 19 Toffee Brown | 19 Toffee Brown | 19 Toffee Brown |
| 20 Pale Sand | 20 Pale Sand | 20 Pale Sand | 20 Pale Sand |
| 21 Light Pistachio | 21 Light Pistachio | 21 Light Pistachio | 21 Light Pistachio |
| 22 Natural Grey | 22 Natural Grey | 22 Natural Grey | 22 Natural Grey |
| 23 Carob Brown | 23 Carob Brown | 23 Carob Brown | 23 Carob Brown |

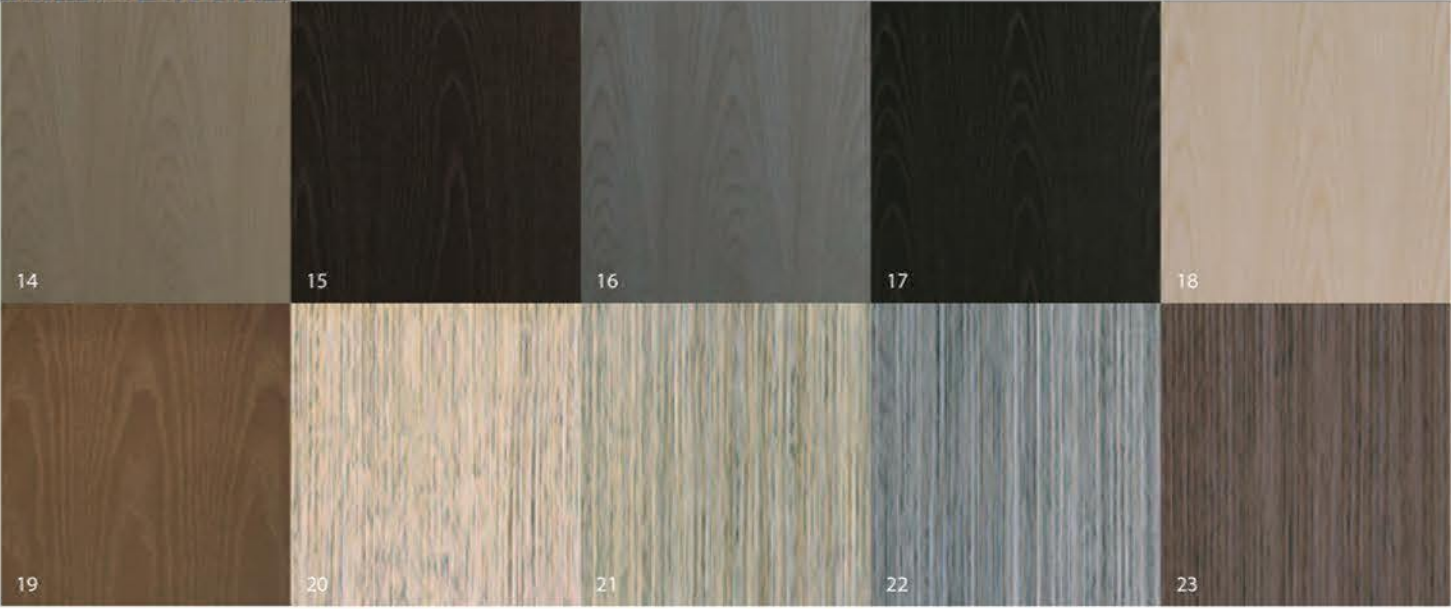

finishes

LACDOR®

Lacquered finish with
approximate RAL colour

Acabado lacado con color
RAL aproximado

24	Lacado Branco RAL9003	24	White Lacquered RAL9003	24	Lacado Blanco RAL9003	24	Laqué Blanc RAL9003
25	Branco Satin RAL9003	25	Satin White RAL9003	25	Blanco Satin RAL9003	25	Blanc Satin RAL9003
26	Pure White RAL9010	26	Pure White RAL9010	26	Pure White RAL9010	26	Pure White RAL9010
27	Telegrey 4 RAL7047	27	Telegrey 4 RAL7047	27	Telegrey 4 RAL7047	27	Telegrey 4 RAL7047
28	Iron Grey RAL7011	28	Iron Grey RAL7011	28	Iron Grey RAL7011	28	Iron Grey RAL7011
29	Claret Violet RAL4004	29	Claret Violet RAL4004	29	Claret Violet RAL4004	29	Claret Violet RAL4004
30	Grey Beige RAL1019	30	Grey Beige RAL1019	30	Grey Beige RAL1019	30	Grey Beige RAL1019
31	Grey White RAL9002	31	Grey White RAL9002	31	Grey White RAL9002	31	Grey White RAL9002



DEKORDOR® 3D

Horizontal embossed
design

Revestimiento con relieve
y diseño horizontal

32	3D Cinza	32	3D Grey	32	3D Ceniza	32	3D Gris
33	3D Carvalho Washed	33	3D Washed Oak	33	3D Roble Washed	33	3D Chêne Washed
34	3D Preto	34	3D Black	34	3D Negro	34	3D Noir
35	3D Dark Cedar	35	3D Dark Cedar	35	3D Dark Cedar	35	3D Dark Cedar

finishes

DEKORDOR® HD

Laminate finish, hard wearing, with real wood appearance and plain colours

Revestimiento de alta resistencia que reproduce la chapa natural de madera y colores lisos

- 36

HD Wenge
- 37

HD Carvalho
- 38

HD Freixo
- 39

HD Faia Vaporizada
- 40

HD Cinza Carbon
- 41

HD Cinza Dark
- 42

HD Cinza Volcanic
- 43

HD Cinza Olive
- 44

HD Cinza Silver
- 45

HD Cinza Dove
- 46

HD Cinza Garlic
- 47

HD Purpura Orchid
- 48

HD Vermelho Vintage
- 49

HD Laranja Carrot
- 50

HD Amarelo Spring
- 51

HD Azul Lake
- 52

HD Azul Seas
- 53

HD Azul Breeze
- 54

HD Verde Aqua
- 55

HD Verde Cooler
- 56

HD Castanho Mushroom
- 57

HD Creme Liqueur
- 58

HD Creme Sandy
- 59

HD Creme Stone
- 60

HD Creme Pure
- 61

HD Branco
- 36

HD Wenge
- 37

HD Oak
- 38

HD Ash
- 39

HD Steamed Beech
- 40

HD Carbon Grey
- 41

HD Dark Grey
- 42

HD Volcanic Grey
- 43

HD Olive Grey
- 44

HD Silver Grey
- 45

HD Dove Grey
- 46

HD Garlic Grey
- 47

HD Purple Orchid
- 48

HD Vintage Red
- 49

HD Carrot Orange
- 50

HD Spring Yellow
- 51

HD Blue Lake
- 52

HD Blue Seas
- 53

HD Blue Breeze
- 54

HD Aqua Green
- 55

HD Cooler Green
- 56

HD Mushroom Brown
- 57

HD Liqueur Cream
- 58

HD Sandy Cream
- 59

HD Stone Cream
- 60

HD Pure Cream
- 61

HD White
- 36

HD Wenge
- 37

HD Roble
- 38

HD Fresno
- 39

HD Haya Vaporizada
- 40

HD Ceniza Carbon
- 41

HD Ceniza Dark
- 42

HD Ceniza Volcanic
- 43

HD Ceniza Olive
- 44

HD Ceniza Silver
- 45

HD Ceniza Dove
- 46

HD Ceniza Garlic
- 47

HD Púrpura Orchid
- 48

HD Rojo Vintage
- 49

HD Naranja Carrot
- 50

HD Amarillo Spring
- 51

HD Azul Lake
- 52

HD Azul Seas
- 53

HD Azul Breeze
- 54

HD Verde Aqua
- 55

HD Verde Cooler
- 56

HD Mushroom Marrón
- 57

HD Crema Liqueur
- 58

HD Crema Sandy
- 59

HD Crema Stone
- 60

HD Crema Pure
- 61

HD Blanco
- 36

HD Wenge
- 37

HD Chêne
- 38

HD Frêne
- 39

HD Hêtre Étuvé
- 40

HD Gris Carbon
- 41

HD Gris Dark
- 42

HD Gris Volcanic
- 43

HD Gris Olive
- 44

HD Gris Silver
- 45

HD Gris Dove
- 46

HD Gris Garlic
- 47

HD Pourpre Orchid
- 48

HD Rouge Vintage
- 49

HD Orange Carrot
- 50

HD Jaune Spring
- 51

HD Bleu Lake
- 52

HD Bleu Seas
- 53

HD Bleu Breeze
- 54

HD Vert Aqua
- 55

HD Vert Cooler
- 56

HD Brun Mushroom
- 57

HD Crème Liqueur
- 58

HD Crème Sandy
- 59

HD Crème Stone
- 60

HD Crème Pure
- 61

HD Blanc



Figure 1 displays seven schematic diagrams of vertical and horizontal panels, each with a small circular icon in the bottom-left corner. The panels are labeled as follows:

- Vertical**: A vertical panel with a dense, wavy, wood-grain-like texture.
- Horizontal**: A horizontal panel with a dense, wavy, wood-grain-like texture.
- IG1VL**: A vertical panel with a thin vertical line running down the center.
- IG2VL**: A vertical panel with a thin vertical line running down the center, flanked by thin vertical lines on either side.
- IG2H**: A horizontal panel with a thin horizontal line running across the center.
- IG3H**: A horizontal panel with a thin horizontal line running across the center, flanked by thin horizontal lines above and below.
- IG4H**: A horizontal panel with a thin horizontal line running across the center, flanked by thin horizontal lines above and below, and additional thin horizontal lines further up and down.

V610 DFG16 or V10¹⁾ V3 V4 DFG40 DFG41 DFG56 DFG54 DFG01 L

(1) DFG16 suitable for fire and non fire doors. V10 only suitable for non fire doors. Different glazing openings will apply for these models.

PG2V2H PG2V4H PG1P PG2P PG3P PG4P PG6V PG1P4V PG1VL PG2V PG2H

PG3H PG4H PG6H PG3PN PG2P2V PG2VL PG2V2 PG24 PG25


[illegible]

Note: Grooves on performance doors - Only available with 1,5mm depth, ending before the edge of the door.

Key	
•	Available in Portaro® or Block
	Available in Portaro
•	Available in Block

[illegible]

Modern Range

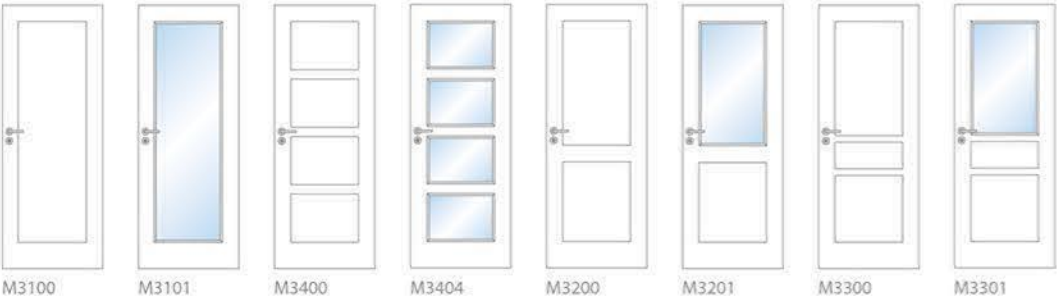


K Range




P Range




F Range

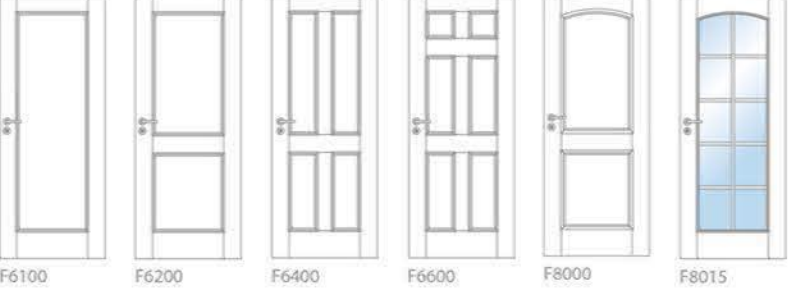


Modern Range detail




P Range detail



K Range detail



F Range detail



Performances available

Models	Fire Doors								Acoustic Doors				
	EI30	FD30	EI/FD30 Inverse	EI/FD30 Swinging	EI60	FD60	FD60 Swinging	FD90	EI30 AC32dB	EI/FD30 AC34dB	EI30 AC41dB	EI/FD30 AC42dB	EI/FD30 AC45dB
M Range	•				•				•				
K Range													
P Range													
F Range	•				•				•				

Key	
•	Available in Portaro® or Block
	Available in Portaro
•	Available in Block

Acoustic Doors						Security Doors						
EI30 Inverse AC39dB	EI30 Inverse AC45dB	FD60 AC34dB	EI60 AC32dB	EI60 AC35dB	EI60 AC43dB	Security	Security FD30	Security EI30 AC35dB	Security EI30 AC37dB	SBD EI/FD30	SBD EI30 Inverse	SBD FD 60
			•			•		•				
						•						
						•						
			•			•		•				

details

grooves, inlays & frames



Models and finishes available

Line	Models	Finishes							
		Naturdor®	Naturdor® SL	Naturdor® Stained	Dekordor® SHD	Dekordor® HD	Dekordor® 3D	Dekordor® SD	Lacdor
Essential	Vertical								
	Horizontal								
	Grooved								
	Inlaid								
Exclusive	EX20 to EX24								
	EX70 to EX73								
	Other								
Classic	M Range								
	K Range								
	P Range								
	F Range								

Essential Naturdor® Walnut




Grooves

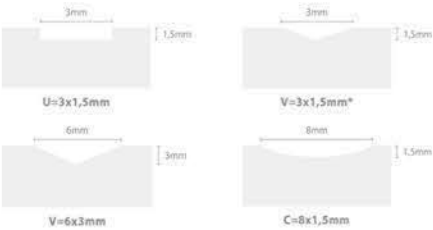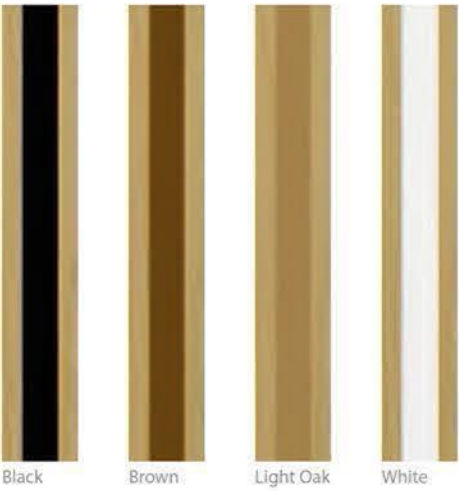

* Not available in satin white

Grooves - Naturdor® Stained


These groove colours are available only for the following finishes:



Inlays



Architraves

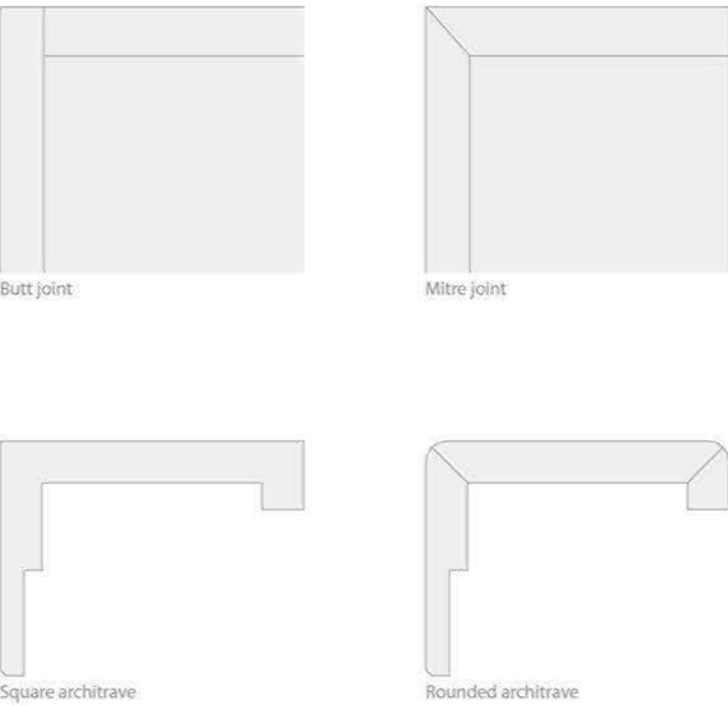

finishes

all options

Naturdor®



- 1 Ash Fresno
- 2 Steamed Beech Haya Vaporizada
- 3 Walnut Nogal
- 4 Maple Maple
- 5 Cherry Cerezo
- 6 Oak Roble
- 7 Sapele Sapelly

Naturdor® SL



- 8 Wenge Dark SL Wenge Dark SL
- 9 Oak SL Roble SL
- 10 Walnut SL Nogal SL
- 11 Teak SL Teka SL
- 12 Zebrano SL Zebrano SL
- 13 Ebony SL Ébano SL

Naturdor® Stained



- 14 Dark Champagne
- 15 Deep Brown
- 16 Marina Grey
- 17 Nightfall Black
- 18 Pastel Cream
- 19 Toffee Brown
- 20 Pale Sand
- 21 Light Pistachio
- 22 Natural Grey
- 23 Carob Brown

Lacdor®



- 24 White Lacquered RAL9003 Lacado Blanco RAL9003
- 25 Satin White RAL9003 Blanco Satin RAL9003
- 26 Pure White RAL9010
- 27 Telegrey 4 RAL7047
- 28 Iron Grey RAL 7011
- 29 Claret Violet RAL4004
- 30 Grey Beige RAL1019
- 31 Grey White RAL9002

Dekordor® SHD



- 32 SHD White SHD Blanco
- 33 SHD Cream SHD Crema
- 34 SHD Yellow SHD Amarillo
- 35 SHD Orange SHD Naranja
- 36 SHD Blue SHD Azul
- 37 SHD Grey Dark SHD Ceniza Dark

finishes

all options

Dekodor® 3D



- 38**
3D Grey
3D Ceniza
- 39**
3D Washed Oak
3D Roble Washed
- 40**
3D Black
3D Negro
- 41**
3D Dark Cedar

Dekodor® HD



- 42**
HD Wenge
HD Wenge
- 43**
HD Oak
HD Roble
- 44**
HD Ash
HD Fresno
- 45**
HD Steamed Beech
HD Haya Vaporizada
- 46**
HD Carbon Grey
HD Ceniza Carbon
- 47**
HD Dark Grey
HD Ceniza Dark
- 48**
HD Volcanic Grey
HD Ceniza Volcanic
- 49**
HD Olive Grey
HD Ceniza Olive
- 50**
HD Silver Grey
HD Ceniza Silver
- 51**
HD Dove Grey
HD Ceniza Dove
- 52**
HD Garlic Grey
HD Ceniza Garlic
- 53**
HD Purple Orchid
HD Púrpura Orchid
- 54**
HD Vintage Red
HD Rojo Vintage
- 55**
HD Carrot Orange
HD Naranja Carrot
- 56**
HD Spring Yellow
HD Amarillo Spring
- 57**
HD Blue Lake
HD Azul Lake
- 58**
HD Blue Seas
HD Azul Seas
- 59**
HD Blue Breeze
HD Azul Breeze
- 60**
HD Aqua Green
HD Verde Aqua
- 61**
HD Cooler Green
HD Verde Cooler
- 62**
HD Mushroom Brown
HD Mushroom Marrón
- 63**
HD Liqueur Cream
HD Crema Liqueur
- 64**
HD Sandy Cream
HD Crema Sandy
- 65**
HD Stone Cream
HD Crema Stone
- 66**
HD Pure Cream
HD Crema Pure
- 67**
HD White
HD Blanco

Dekodor® SD



- 68**
SD Glacier
- 69**
SD Canyon
- 70**
SD Forest
- 71**
SD Steamed Beech
SD Haya Vaporizada
- 72**
SD Oak
SD Roble
- 73**
SD Ash
SD Fresno
- 74**
SD Wenge
SD Wenge
- 75**
SD Walnut
SD Nogal
- 76**
Tundra
- 77**
Mountain
- 78**
Alpine
- 79**
Desert
- 80**
White Foil Smooth
SD Blanco
- 81**
SD White Woodgrain
- 82**
CDW Glacier
- 83**
CDW Canyon
- 84**
CDW Forest
- 85**
CDW Oak
CDW Roble
- 86**
CDW Tundra
- 87**
CDW Mountain
- 88**
CDW Alpine
- 89**
CDW Desert

projects

Electricity House



Fulham Riverside



Plage des Nations



World Wildlife Fund Living Planet Centre




Bayview House



Dar Essalam Apartments



Ronald McDonald House

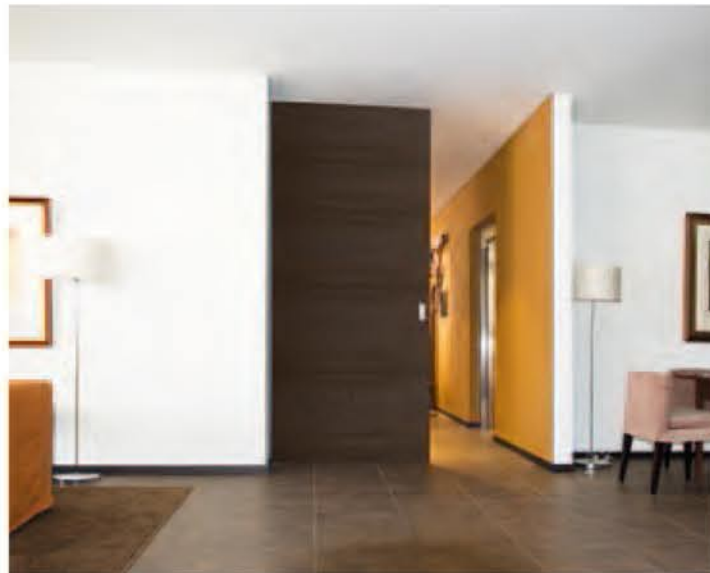

The Gate Towers



projects

Peninsula Paris Hotel



Vila Galé Évora Hotel




Vinci Porto Hotel



Bessa Lisboa Hotel




Radisson Hotel Santa Cruz

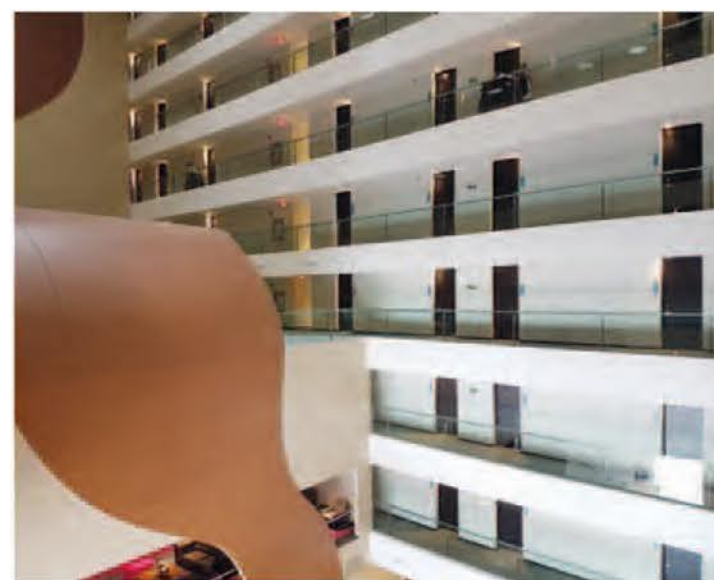


JW Marriott Tétouan Hotel



Electricity House

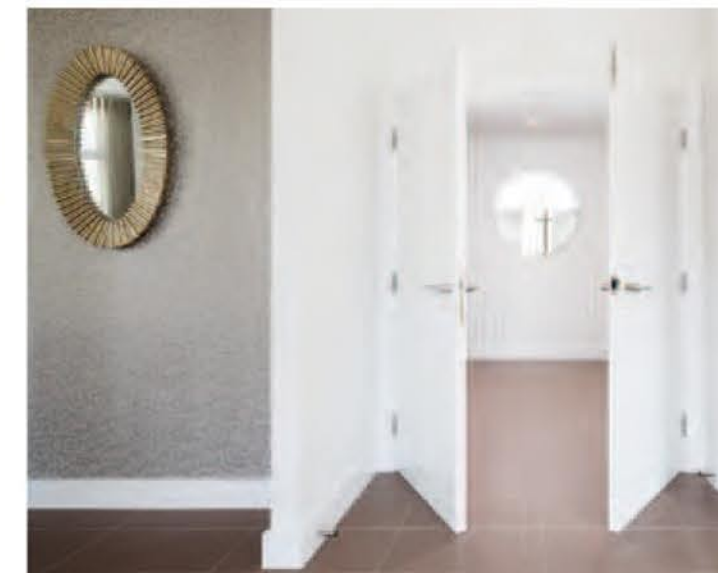

Mercure Porto Centro Hotel

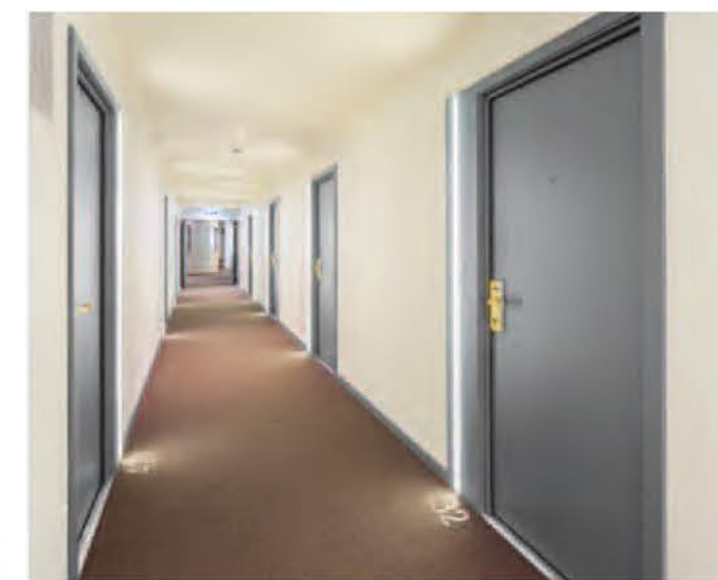

projects

Sofitel Dubai Downtown



Lenitudes Medical Center & Research



Pestana CR7 Lisboa Hotel



Meyerhold Opera Hotel



Montemor School



Bella Vida Care Home



CUF Hospital





Vergilio Ferreira School



exclusive

models & performances

All models

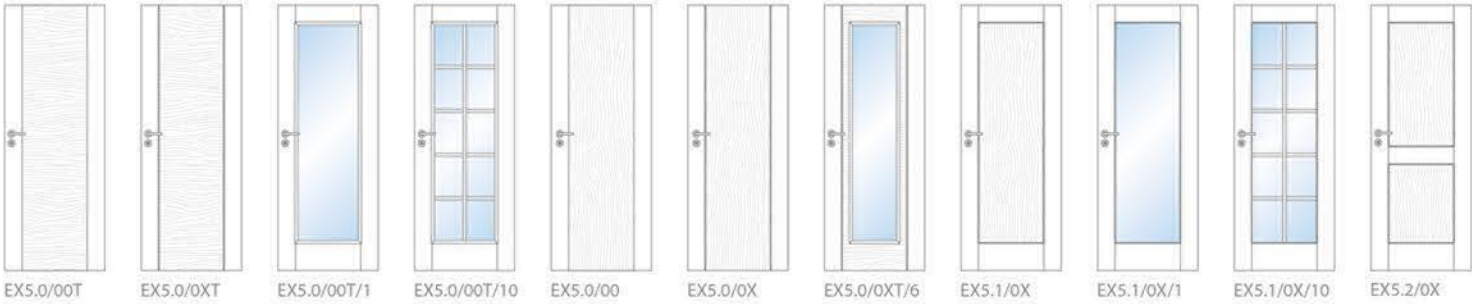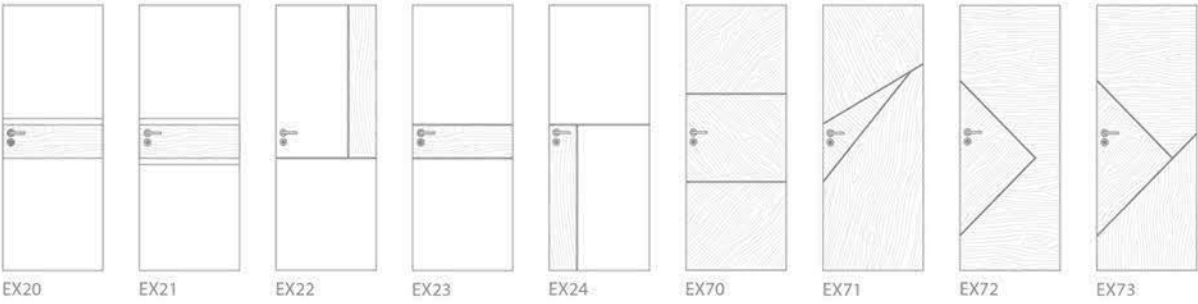

Performances available

Models	Fire Doors								Acoustic Doors				
	EI30	FD30	EI/FD30 Inverse	EI/FD30 Swinging	Ei60	FD60	FD60 Swinging	FD90	EI30 AC32dB	EI/FD30 AC34dB	EI30 AC41dB	EI/FD30 AC42dB	EI/FD30 AC45dB
EX20 to EX24	•				•				•				
EX70 to EX73	•												
Other	•				•			(1)	•				
Glazing													

(1) Not available with aluminium inlay.

Acoustic Doors						Security Doors						
EI30 Inverse AC39dB	EI30 Inverse AC45dB	FD60 AC34dB	Ei60 AC32dB	Ei60 AC35dB	Ei60 AC43dB	Security	Security FD30	Security EI30 AC35dB	Security EI30 AC37dB	SBD EI/FD30	SBD EI30 Inverse	SBD FD 60
•	•	•	•	•	•							
						•		•				
•	•	•	•	•	•	•		•				

Key	
•	Available in Portaro® or Block
	Available in Portaro
•	Available in Block