

Slat panel S / M Decorative panel XL


TECHNICAL CARD



Profile type	Slat panel S / M Decorative panel XL
Material	PVC-U
Width x length / Coverage dimensions	<ul style="list-style-type: none"> • 14,8 cm x 265 cm / 14 cm x 265 cm - Slat panel S • 16,0 cm x 265 cm / 15 cm x 265 cm - Slat panel M • 60,9 cm x 265 cm / 60 cm x 265 cm - Decorative panel XL
Thickness	1,4 cm - Slat panel S 2,0 cm - Slat panel M 0,8 cm - Decorative panel XL
Weight	5,17 kg/m ² - Slat panel S 5,31 kg/m ² - Slat panel M 4,34 kg/m ² - Decorative panel XL
Packing / Coverage area	<ul style="list-style-type: none"> • 14 cm x 265 cm: 1 szt. (0,37 m²/pack) - Slat panel S • 15 cm x 265 cm: 1 szt. (0,40 m²/pack) - Slat panel M • 60 cm x 265 cm: 1 szt. (1,59 m² /pack) - Decorative panel XL
Storage	Store the product in covered rooms and keep it away from heating devices and direct sunlight. Keep the product under conditions that protect it against contamination, deformation and mechanical damage.
Tools	Use a saw for cutting. When installing the product use a glue/silicone gun, a tape, a sponge, a pencil, a spirit level, a tape measure, a utility (Stanley) knife and a hole saw.
Joint	Installing with glue. Tongue-and-groove joint.
Installation temperature	Before installation, leave the panels for 24 hours in the room where they are going to be fitted so that their temperature equals the ambient temperature.
Important installation information	<ul style="list-style-type: none"> • The product can be installed in wet rooms (kitchen, bathroom) except in areas exposed to direct water contact, provided that it is sealed with silicone. Waterproofing the walls is recommended, too. • Do not install the product in places exposed to open flame (gas stove). Do not use in areas exposed to high temperatures (above 60°C), such as saunas, chimneys, or walls with exhaust ducts • Installing with glue: The surface must be smooth, even, and free of dust, ensuring proper adhesion of the adhesive; it is recommended to use single-component hybrid polymer adhesives that do not contain solvents or isocyanates.
Maintenance	Clean with a damp cloth or a mild detergent. Do not leave any liquid stains to dry. Vigorous scrubbing and strong cleaning agents may damage the panel surface or discolour it. Do not use solvents or acids or any liquids based on them for cleaning. Do not use sharp or coarse cloths, sponges and brushes for cleaning. Do not leave cleaning agents on the surface. After cleaning, rinse thoroughly with water. If left on the surface, cleaning agents may cause discolouration.
Environmental characteristics	The product is 100% recyclable.

Essential characteristics	Performance	Assessment methods
Impact resistance	Not less than 1J (23.01)	PN-EN 13245-2:2009 / AC: 2010
Release of hazardous substances *	NPD	-
Reaction to fire	D-s3;d0	PN-EN 13 501-1:2019-02
Fastening strength	See: assembly instructions	PN-EN 13245-2:2009 / AC: 2010

* Panels meet the requirements of the Model Administrative Provisions (MVV TB 2024/1). Veröffentlichung der Muster-Verwaltungsvorschrift Technische Baubestimmungen, (Ausgabe 2024/1) regarding the emission of hazardous substances and meet the requirements Arrêté du 19 avril 2011 relatif à l'étiquetage des produits de construction ou de revêtement de mur ou de sol et des peintures et vernis sur leurs émissions de polluants volatils in terms of the release of hazardous substances for class A+.

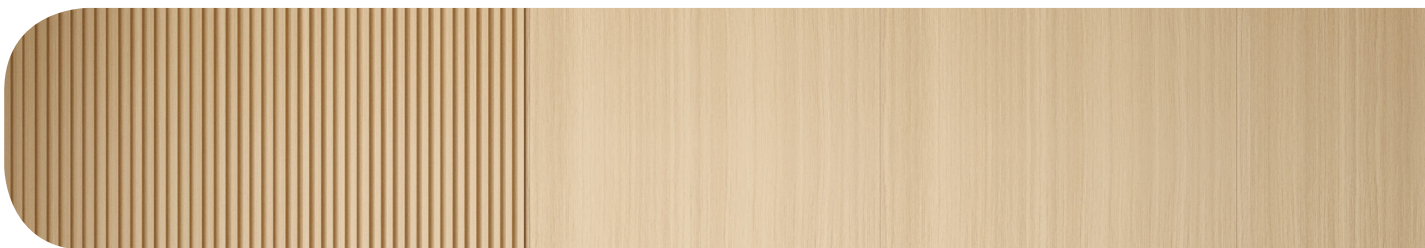

QUICK
TO INSTALL



DIY
INSTALLATION




WATER-RESISTANT



INSTALLATION
WITH GLUE



SUBTLE
CONNECTIONS



COMPLEMENTARY
SYSTEM